

LED Multi Wattage Multi CCT Post Top Light

Built-in motion sensor with photocell

CONSTRUCTION:

Die-cast Aluminum

OPTICAL SYSTEM:

Lumileds SMD2835 LED chips. 100°*140° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -40°C to 50°C, -40°F to 122°F

INSTALLATION & MOUNTING:

Pole mounting – Suitable for 3" poles

CONTROLS & DIMMING:

0-10V dimming comes standard.

Built-in motion sensor with photocell

FEATURES

- Default Wattage: 100W
- Default CCT: 5,000K
- IP65 rated
- Type 5 lens
- Driver Surge Protection: L/N-PE: 4kV, L-N: 6kV
- No UV or IR in the beam
- Light is soft and uniform
- Instant start, no flickering or humming
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Area lighting
- Parking decks
- Auto dealerships
- Plazas
- Housing complexes
- Shopping malls
- Sporting complexes
- Parks and Recreational areas
- Municipal lots

Built-in motion sensor
with photocell



DLC Product ID:

- LOC-PT-MW(25/50/75/100)MCCT(30/40/50) – S-B1C9MD

OPTIONAL ACCESSORIES:



Remote Control
LOC-RC-WHITE-G1





BUG RATING	EPA
B3-U0-G2	1.3ft²

LOC-PT-MW(25/50/75/100)MCCT(30/40/50)

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
25W	3000K / 4000K / 5000K	2,921.5LM	116.86lm/W	120-277V	83	0.9	15%	150W – 175W HID
50W	3000K / 4000K / 5000K	5,843LM	116.86lm/W	120-277V	83	0.9	15%	175W – 320W HID
75W	3000K / 4000K / 5000K	8,764.5LM	116.86lm/W	120-277V	83	0.9	15%	320W – 400W HID
100W	3000K / 4000K / 5000K	11,686LM	116.86lm/W	120-277V	83	0.9	15%	400W – 600W HID

MEASUREMENTS

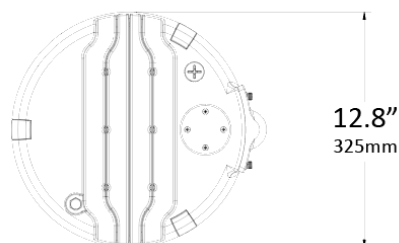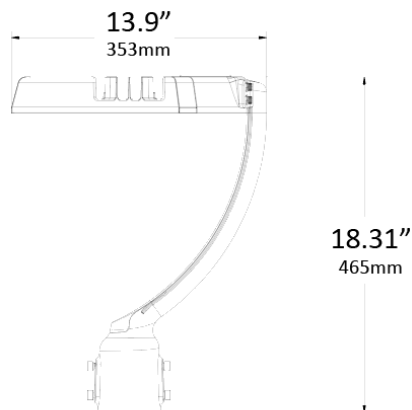

MODEL	QTY	NET WEIGHT	MASTER CARTON SIZE	GROSS WEIGHT	PCS CTN	UPC CODE
LOC-PT-MW(25/50/75/100)MCCT(30/40/50)	1	9.7 lbs	19.29" x 18.5" x 5.71"	12.57lbs	1	00810050947664