

Date: \_\_\_\_\_ Location: \_\_\_\_\_  
 Product: \_\_\_\_\_ Project: \_\_\_\_\_  
 Quantity: \_\_\_\_\_ Catalog #: \_\_\_\_\_

## LED 4FT T5 Type A + B LOC-T54FT Series

### FEATURES

- Type B Double Ended
- Plug & Play Dual Mode (Type A & B)
- Low thermal decay & maintenance
- No Mercury or UV
- 50,000 hours lifetime
- NSF rated for splash zone and non-food zone

### SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports



#### NSF Model Number:

- LOC-4FTT5GP-24W50K

#### CONSTRUCTION:

Frosted Filmed Glass Lens.

#### OPTICAL SYSTEM:

Bridgelux or ShineON 2835 LED chips. 110° beam angle / 300° view angle

#### WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

#### ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F  
 Ballast compatible.

#### INSTALLATION & MOUNTING:


Type B double ended. Plug & Play dual mode (Type A & B).



MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-T54FT-24W50KGF YM	24W	3,600LM	150LM/W	80	0.9	20%	54W

Series	Type	Wattage	CCT Options	Lens	Power
LOC-YM	T5 4 Foot	24W	5000K	Frosted	YM – Type A & B


## MEASUREMENTS

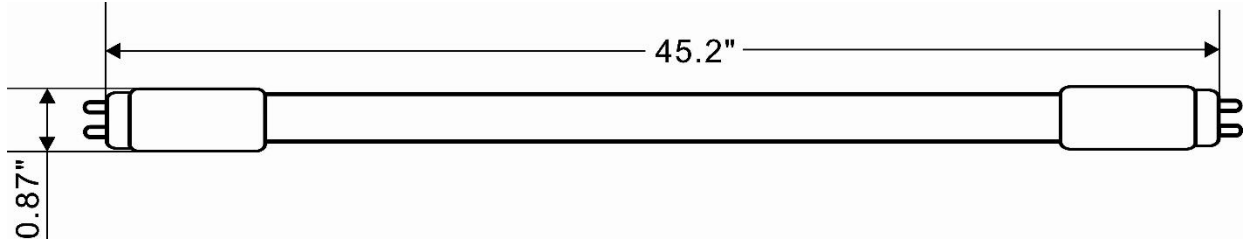

MODEL -5,000K	QUANTITY	WEIGHT	UPC CODE
LOC-T54FT-24W50KGF YM	1	0.31 lbs	00815586028764


## PHOTOMETRIC DATA

### 24W 5,000K

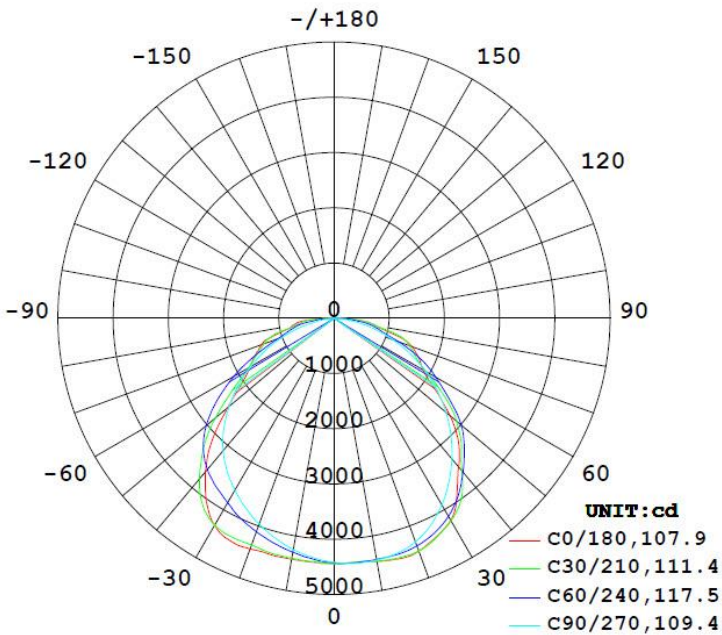

AVERAGE BEAM ANGLE (50%) : 111.5 DEG

Flux out: 9399 lm

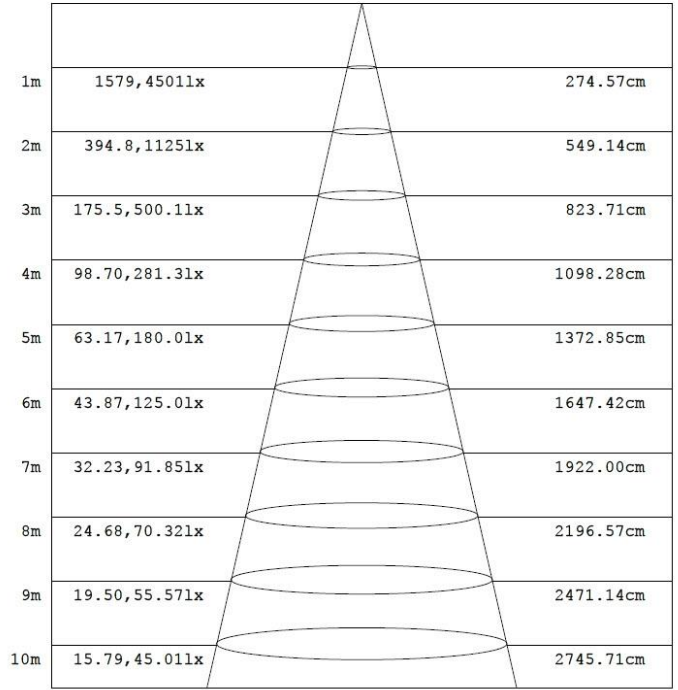

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.