

## LED Adjustable Wall Pack Series



**30W**



0-90° Adjustable

### FEATURES

- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- 50,000 hours lifetime

### SUITABLE APPLICATIONS

- Residential Complexes
- Parking Decks
- Shopping Malls
- Sporting Complexes
- Logistic Centers
- Auto dealerships
- Municipal Lots



0-90° Adjustable



**75W & 100W**

#### Special Order:

- Other CCTs

#### CONSTRUCTION:

Heavy die-cast aluminum housing with polyester powder-coated finish. Integral secondary heat sink to optimize thermal transfer and maximize performance of the LEDs.

#### OPTICAL SYSTEM:

Philips Lumiled 3030 LED chips. High quality tempered glass optics. 100° beam angle.

#### WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

#### ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

#### INSTALLATION & MOUNTING:

Wall mount.

#### CONTROLS & DIMMING:

0-10V dimming comes standard.




MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOD-AWP-30W-50K-LV-V12	30W	3,450LM	115LM/W	70	0.91	11.4%	100W
LOD-AWP-75W-50K-LV-V12	75W	9,000LM	120LM/W	70	0.96	13.8%	150W
LOD-AWP-100W-50K-LV-V12	100W	12,000LM	120LM/W	70	0.94	12.8%	200W


Series	Wattage	Color Temperature	Voltage
LOD-AWP	30W 75W 100W	5000K	LV = 120-277V

MEASUREMENTS

30W

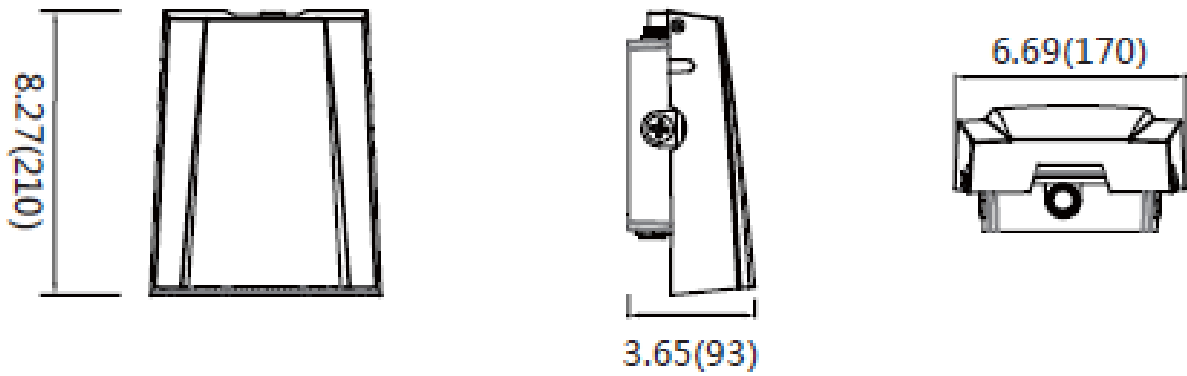


75W & 100W

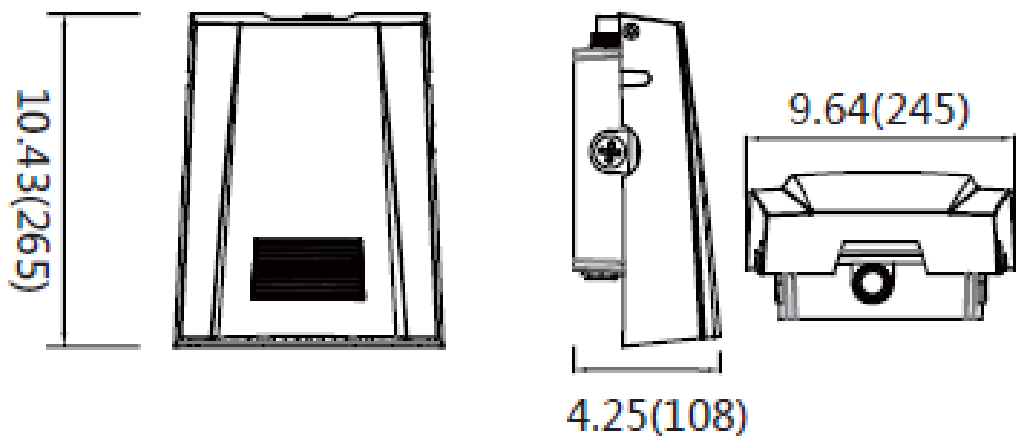


MODEL	QUANTITY	WEIGHT	UPC CODE
LOD-AWP-30W-50K-LV-V12	1	lbs	00810050940252
LOD-AWP-75W-50K-LV-V12	1	lbs	00810050940276
LOD-AWP-100W-50K-LV-V12	1	lbs	00810050940280

30W

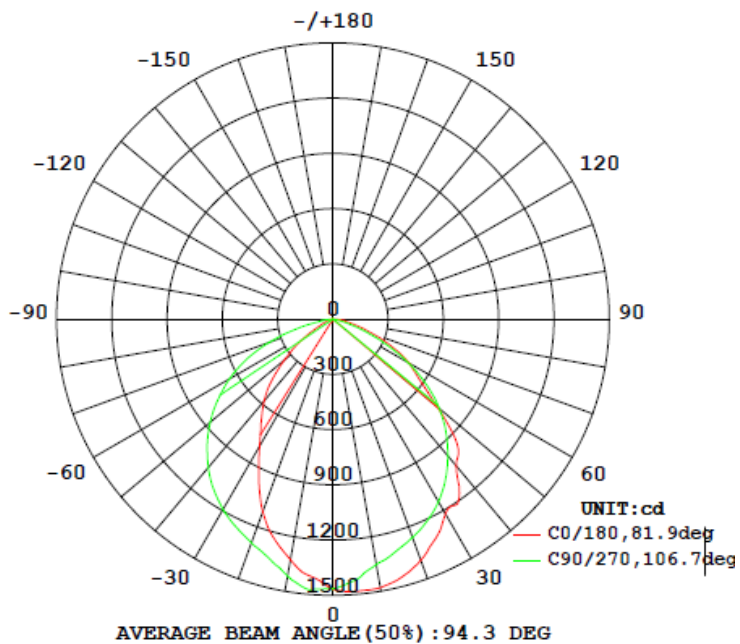

75W

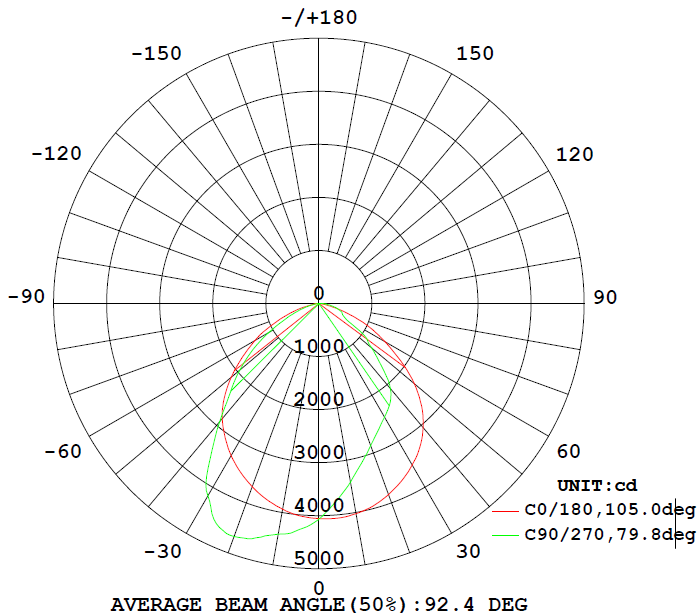

100W

