


## LED 2FT U-Shaped Type A + B Tube Series

### FEATURES

- Type A + B
- Low thermal decay & maintenance
- No Mercury, UV or Lead
- 50,000 hours lifetime

### SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

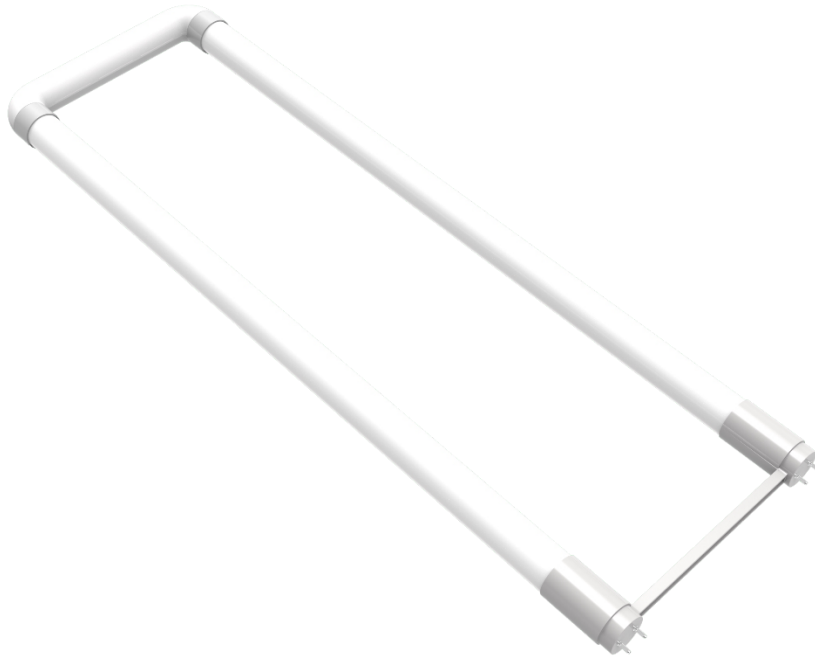

### CONSTRUCTION:

Glass with shatterproof coating. Frosted lens. G13 base.

### ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

### OPTICAL SYSTEM:

Hongli 2835 LED chips. 180° beam angle.

### INSTALLATION & MOUNTING:

Type A + B

### WARRANTY:


5-year limited warranty. Actual performance may differ as a result of end-user environment and application.



MODEL NUMBER	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-U2FT-15W40K-AB	15W	1,700LM	125.926LM/W	83	0.9	20%	60W
LOC-U2FT-15W50K-AB	15W	1,700LM	125.926LM/W	83	0.9	20%	60W


Series	Type	Wattage	CCT Options	Power
LOC-	U2FT = U-Shaped 2 Foot	15W	4000K 5000K	AB = Type A + B

MEASUREMENTS

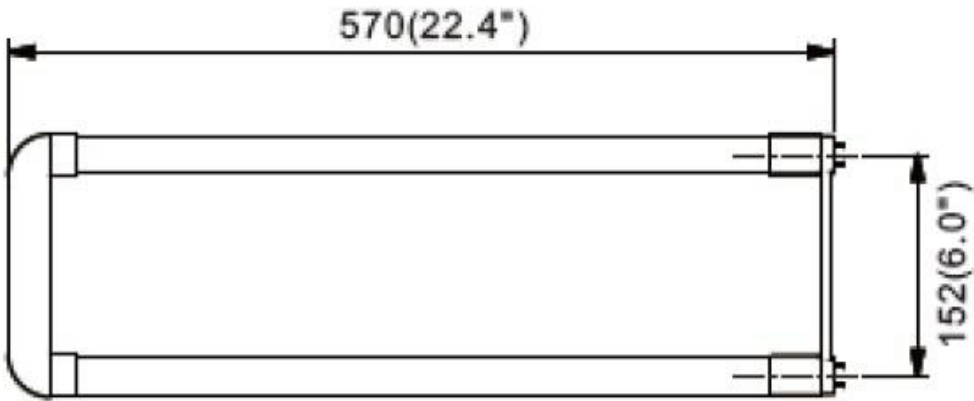

MODEL NUMBER	QUANTITY	WEIGHT	UPC CODE
LOC-U2FT-15W40K-AB	1	0.55 lbs	00815586025657
LOC-U2FT-15W50K-AB	1	0.55 lbs	00815586025633

C Plane Distribution Diagram

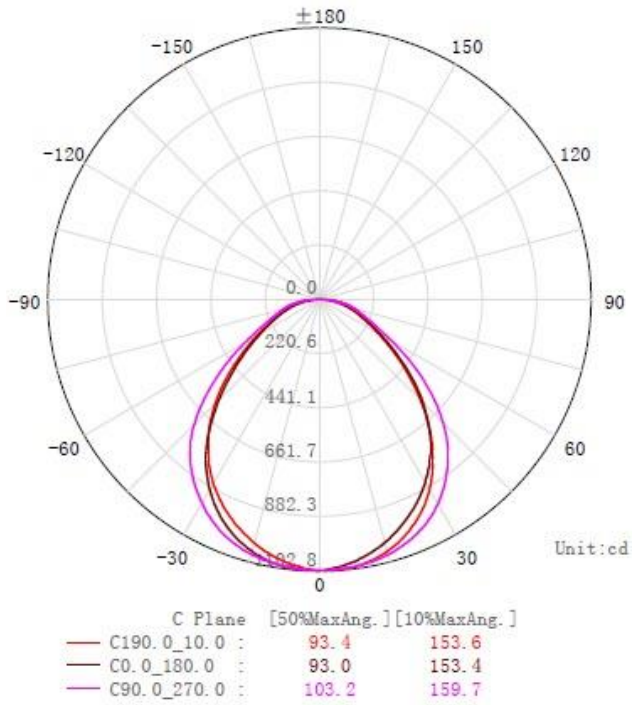

Illuminance-Distance Curve

