


## PRODUCT DESCRIPTION:

T8 linear tube retrofits are usually but not specifically used in commercial buildings such as hotels, conference rooms, schools, supermarkets, factory, parking garages, hospitals, airport, metro stations, bus stations, office buildings and any other sites where request long-time and hi-output lighting.

## FEATURES:

- Hongli 2835 LED Chips
- Low thermal decay
- Low maintenance
- No mercury, lead-free
- No UV

## DIMENSIONS:

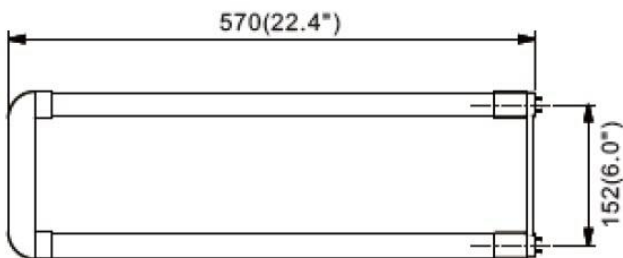

## 15W 2FT U-Shape Tube

LOC-U2FT-15W40K-AB

LOC-U2FT-15W50K-AB




### SPECIFICATIONS:


SPECIFICATION	Details	
Model	LOC-U2FT-15W40K-AB	LOC-U2FT-15W50K-AB
Input Wattage (W)	15W	
Lumens Delivered (LM)	1,700LM	1,700LM
Efficacy (LM/W)	125.926LM/W	125.926LM/W
CRI	83	83
Lifespan	50,000 hours	
Color Temperature	4,000K	5,000K
Wattage Equivalent	60W	
Dimmable	No	
IP Rating	IP20	
Beam Angle	180	
Input Voltage	AC120-277V	
Power Factor	0.9	0.9
Housing	Glass with shatterproof coating	
Lens	Frosted	
Mounting	G13	
THD	20%	20%
Weight (LBS)	0.55 lbs	
Certification	DLC, UL	
Operating Temperature	-20°C to 50°C (-4°F to 122°F)	
Environment	Indoor	
Warranty	5 years limited	






### TYPE A – BALLAST COMPATIBLE INSTALL:

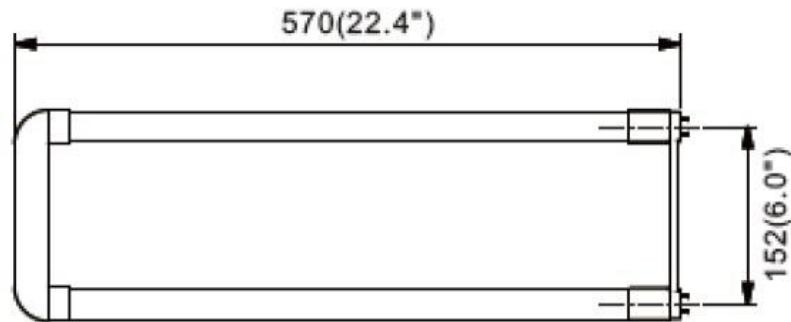

### TYPE B – AC DIRECT, DOUBLE END OR SINGLE END BALLAST BYPASS:

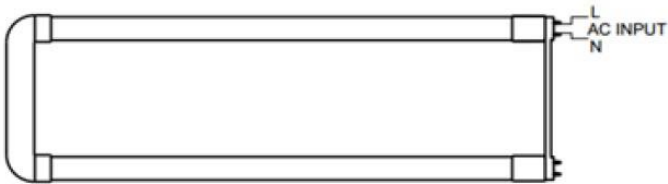

Single Ended Input

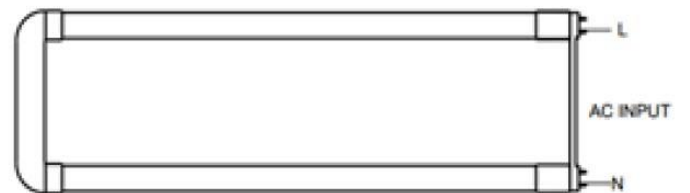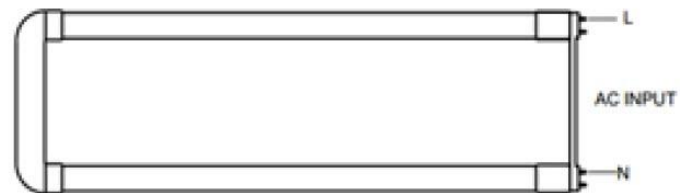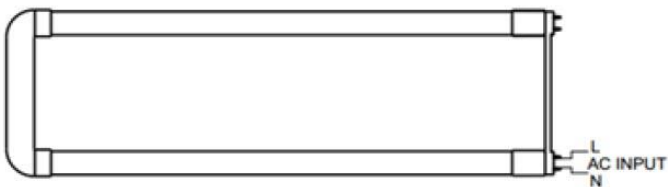

Double Ended Input

