LEDone®

Date:	ate: Location:					
Product:	Project:					
Quantity:	Catalog #:					

LED Multi Watt Multi CCT Down Light

FEATURES

Default Wattage is the highest wattage:

o 6" – 22W o 8" – 30W Default CCT: 5,000K Commercial grade IP43 rated – wet location 50,000 hours lifetime

SUITABLE APPLICATIONS

Kitchens

Bedrooms Bathrooms Corridors Hallways Museums



6" 10W, 15W and 22W

CONSTRUCTION:

Downlight body and endcaps are both fabricated from aluminum for maximum rigidity. Spring clips for easy installation.

OPTICAL SYSTEM:

Frosted lens. $6^{\prime\prime}$ is 92° beam angle and 8″ is 93° beam angle

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.





8" 12W, 20W and 30W

ELECTRICAL:

Uses a -20°C to 40°C (-4°F to 104°F) case temperature drive. Available as 110-277V input.

INSTALLATION & MOUNTING:

Use torsion spring clips to install in place.

DIMMING:

Dimmable range from 0-10V.

Energy STAR







MODEL NUMBER – 3,000K 4,000K 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	REPLACES
LOC-6DL-MW-MCCT	10W / 15W / 22W	900LM / 1,350LM / 1,950LM	88.6LM/W	94	0.98	60W/100W/150W
LOC-8DL-MW-MCCT	12W / 20W / 30W	1,050LM /1,650LM / 2,350LM	76.7LM/W	93	0.98	100W / 150W / 200W

Energy Star ID:


- LOC-6DL-MW-MCCT 2346326
- LOC-8DL-MW-MCCT 2346329

LED Multi Watt Multi CCT Down Light


LEDone®

Series	Size	Wattage Options	CCT Options
LOC-DL	6″	10W / 15W / 22W	3,000K
	8″	12W / 20W / 30W	4,000K
			5,000K
			5,000K

MEASUREMENTS

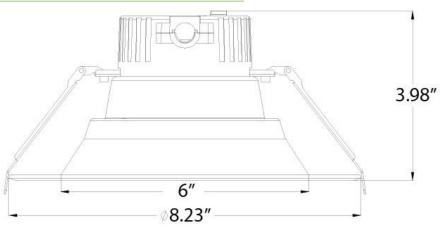

6″

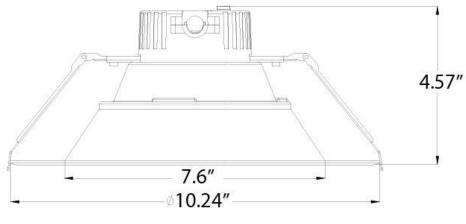

8″

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-6DL-MW-MCCT	1	1.65 lbs	00815586025695
LOC-8DL-MW-MCCT	1	1.84 lbs	00815586025701