

LED LOD-MAAL Area Light Series

FEATURES

- IP65 rated
- Full cut off
- Easy installation
- Shock resistant
- Mercury and UV free
- Corrosion and rust proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Supermarkets
- Logistic Centers
- Exhibition Halls



150W



300W

Special Order:

- 480V models
- Other CCTs
- Type 2 lens
- Type 4 lens
- Type 5 lens

CONSTRUCTION:

Processed by painting and anodic oxidation treatment.

OPTICAL SYSTEM:

Nichia SMD LED chips. 120° beam angle. Type 3 lens standard.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V. -40°C to 50°C, -40°F to 122°F

INSTALLATION & MOUNTING:

Pole Mounting - Extruded Arm, Slip Fitter or U-Bracket.

CONTROLS & DIMMING:

0-10V dimming comes standard. Daylight sensor option available.






MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOD-MAAL-150W-50K-TPIII-SEA	150W	21,249.8LM	143LM/W	70	0.9	20%	400W – 600W HID
LOD-MAAL-300W-50K-TPIII-SBA	300W	42,137LM	145LM/W	70	0.9	20%	750W – 1,000W HID


Series	Wattage	Color Temperature	Lens Type	Voltage
LOD-MAAL	150W 300W	4000K 5000K	T3 = Type 3	SBA = 120-277V SEA = 480V

MEASUREMENTS

150W

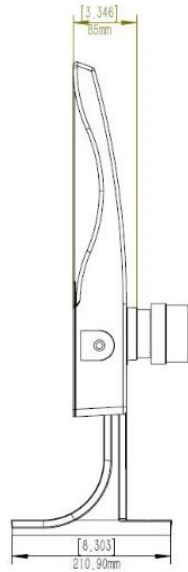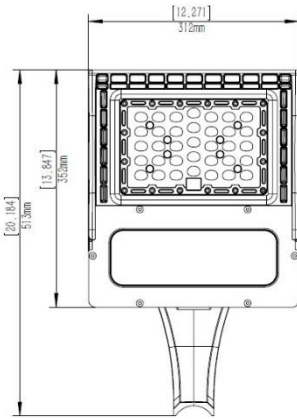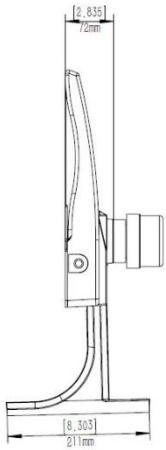

300W

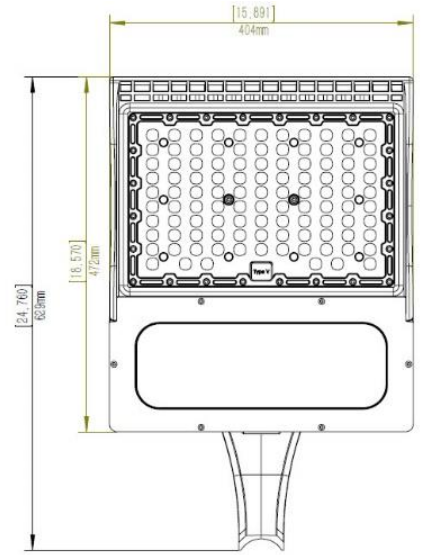

OPTIONAL ACCESSORIES



Slip fitter



Bracket



Extruded Arm



Daylight Sensor