

LED Multi Wattage Troffer Series



2x4

24W, 32W & 39W
4,000K / 5,000K



2x2

19W, 24W & 29W
3,500K

FEATURES

- Default Wattage:
 - 2x2: 29W
 - 2x4: 39W
- IP40 rated
- Flicker-free lighting
- Easy installation
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Schools
- Factories
- Offices
- Supermarkets
- Logistic Centers
- Exhibition Halls

CONSTRUCTION:

Steel and Aluminum frame. Matte white finish. The entire fixture functions as a heat sink to keep the LEDs cooler to prolong the life of the light. Fully integrated reversible hinges.

OPTICAL SYSTEM:

Samsung 2835 LED chips. 120° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

120-277V input standard.
-20°C to 50°C, - 4°F to 122°F

INSTALLATION & MOUNTING:

Surface mount kit and recessed kit.

CONTROLS & DIMMING:



0-10V dimming comes standard.



MODEL NUMBER – 3,500K / 4,000K / 5,000K	SIZE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOD-22MWTR29W-35K	2x2	19W	2,703LM	141.1LM/W	80	0.967	12.72%	100W HID
LOD-22MWTR29W-35K	2x2	24W	3,384LM	141.1LM/W	80	0.967	12.72%	100W HID
LOD-22MWTR29W-35K	2x2	29W	4,092LM	141.1LM/W	80	0.967	12.72%	100W HID
LOD-24MWTR39W-40K	2x4	24W	3,439LM	140.9LM/W	80	0.9	20%	150W HID
LOD-24MWTR39W-40K	2x4	32W	4,160LM	140.9LM/W	80	0.9	20%	150W HID
LOD-24MWTR39W-40K	2x4	39W	5,495LM	140.9LM/W	80	0.9	20%	150W HID
LOD-24MWTR39W-50K	2x4	24W	3,453LM	140.9LM/W	80	0.9	20%	150W HID
LOD-24MWTR39W-50K	2x4	32W	4,160LM	140.9LM/W	80	0.9	20%	150W HID
LOD-24MWTR39W-50K	2x4	39W	5,518LM	140.9LM/W	80	0.9	20%	150W HID


Series	Size	2x2 Wattage	2x4 Wattage	Color Temperature
LOD-22MWTR	22 = 2x2	19W	24W	3500K
LOD-24MWTR	24 = 2x4	24W	32W	4000K
		29W	39W	5000K

MEASUREMENTS

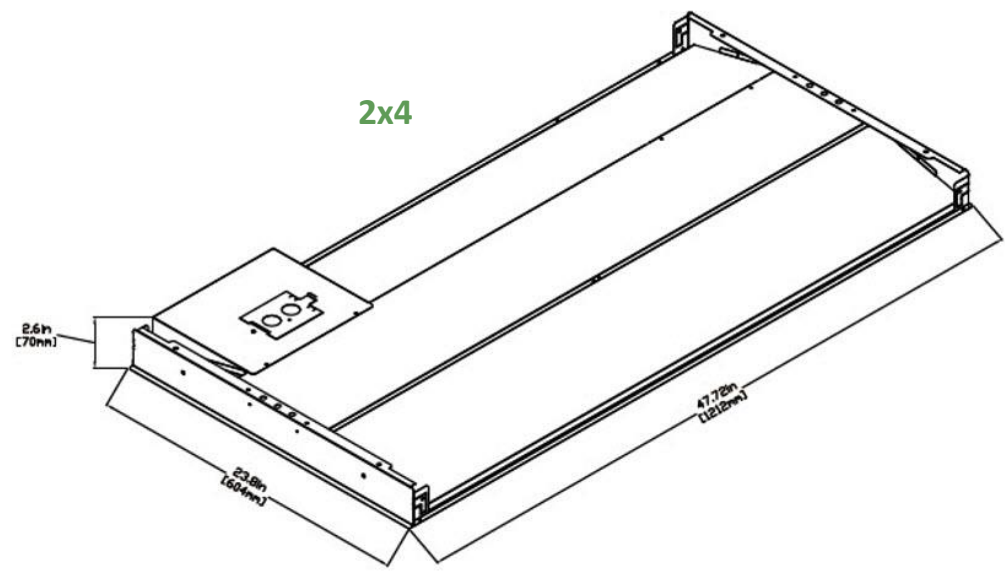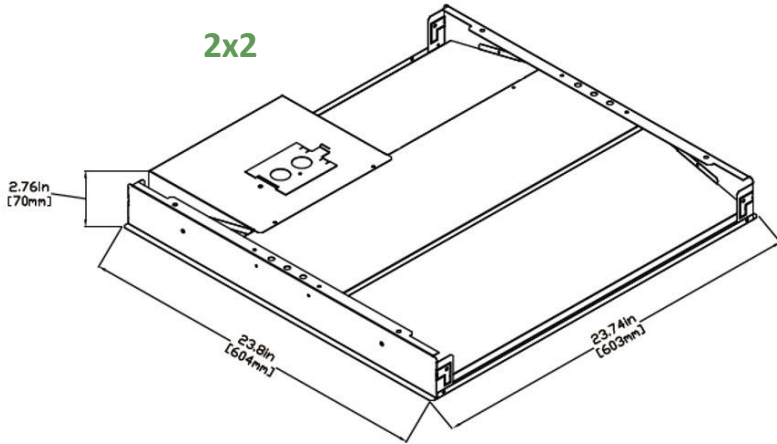

MODEL	QUANTITY	WEIGHT	UPC CODE
LOD-22MWTR29W-35K	1	lbs	00815586029068
LOD-24MWTR39W-40K	1	13.77 lbs	00815586024308
LOD-24MWTR39W-50K	1	13.77 lbs	00815586024346

Surface Mount

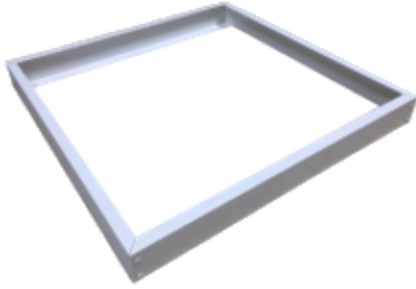

Recessed Mount



OPTIONAL ACCESSORIES



LOC-EMDR-15W-050



LOD-EXTED-M20W