

LED Rotatable Down Light Series



FEATURES

- IP20 rated
- 30° tilt range
- Low maintenance
- No mercury
- Recyclable
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Kitchens
- Bedrooms
- Bathrooms
- Corridors
- Hallways
- Museums

CONSTRUCTION:

Downlight body and endcaps are both fabricated from aluminum for maximum rigidity.

OPTICAL SYSTEM:

SMD LED chips. 120° beam angle. Frosted lens.

WARRANTY:

3-month limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Uses a -20°C to 50°C (-4°F to 122°F) case temperature drive.
Available as AC120.

INSTALLATION & MOUNTING:

Use torsion spring clips to install in place.

DIMMING:

Continuously dimmable





| MODEL NUMBER | WATTAGE | LUMENS | EFFICACY | CRI | POWER FACTOR | REPLACES |
|------------------|---------|---------|----------|-----|--------------|----------|
| LOD-DL4EB-10W30K | 10W | 720LM | 72LM/W | 91 | 0.93 | 75W |
| LOD-DL4EB-10W50K | 10W | 720LM | 72LM/W | 91 | 0.93 | 75W |
| LOD-DL6EB-15W30K | 15W | 1,010LM | 67.3LM/W | 90 | 0.97 | 75W |
| LOD-DL6EB-15W50K | 15W | 1,060LM | 70.7LM/W | 90 | 0.97 | 75W |

Energy Star ID:

- LOD-DL4EB-10W30K – 2320023
- LOD-DL4EB-10W50K – 2320023
- LOD-DL6EB-15W30K – 2320027
- LOD-DL6EB-15W50K – 2320029

| Series | Size | 4 Inch Wattage | 6 Inch Wattage | CCT Options |
|-----------|----------|----------------|----------------|------------------|
| LOD-DL EB | 4" 6" | 10W | 15W | 3,000K 5,000K |

MEASUREMENTS

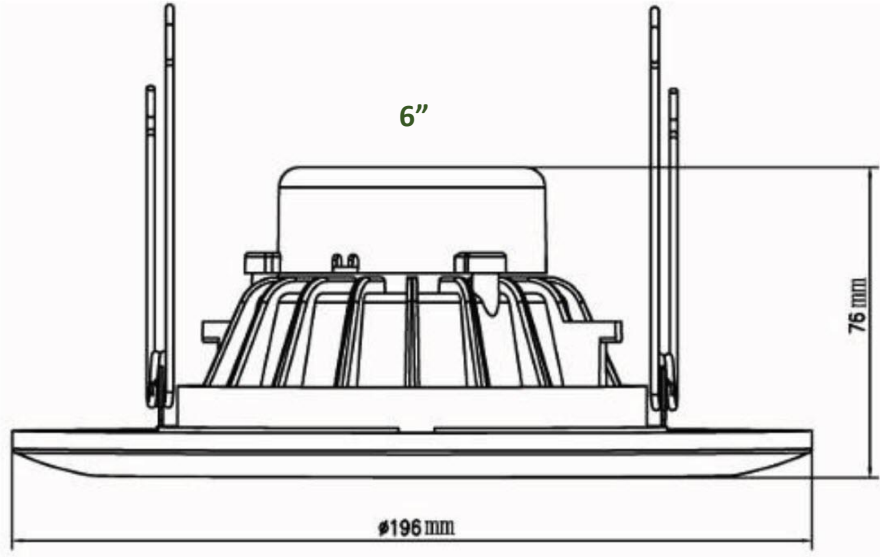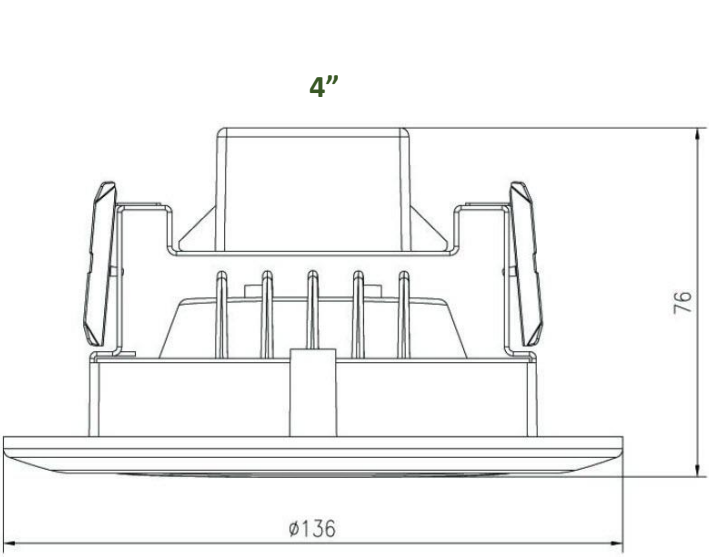

| MODEL | QUANTITY | WEIGHT | UPC CODE |
|------------------|----------|--------|----------------|
| LOD-DL4EB-10W30K | 1 | lbs | 00815586026135 |
| LOD-DL4EB-10W50K | 1 | lbs | 00815586026142 |
| LOD-DL6EB-15W30K | 1 | lbs | 00815586026159 |
| LOD-DL6EB-15W50K | 1 | lbs | 00815586026159 |