

Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____

LED 2x2 Troffer Retrofit



FEATURES

- IP40 rated
- Flicker-free lighting
- Easy installation
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Schools
- Factories
- Offices
- Supermarkets
- Logistic Centers
- Exhibition Halls

CONSTRUCTION:

Steel and Aluminum frame. Matte white finish. The entire fixture functions as a heat sink to keep the LEDs cooler to prolong the life of the light. Fully integrated reversible hinges.

OPTICAL SYSTEM:

Samsung 2835 LED chips. 120° beam angle.

WARRANTY:

3-month limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

120-277V input standard.
-20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Fits most preexisting troffers.

CONTROLS & DIMMING:


0-10V dimming comes standard.



MODEL NUMBER - 5,000K	SIZE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
TRK-22-29/D10/B/50	2x2	29W	3,747LM	129.2LM/W	80	0.9	20%	100W HID

Series	Size	2x2 Wattage	Dimming	Color Temperature
TRK – Troffer Retrofit Kit	22 = 2x2	29W	D10 = 0-10V dimming	50 = 5000K

MEASUREMENTS

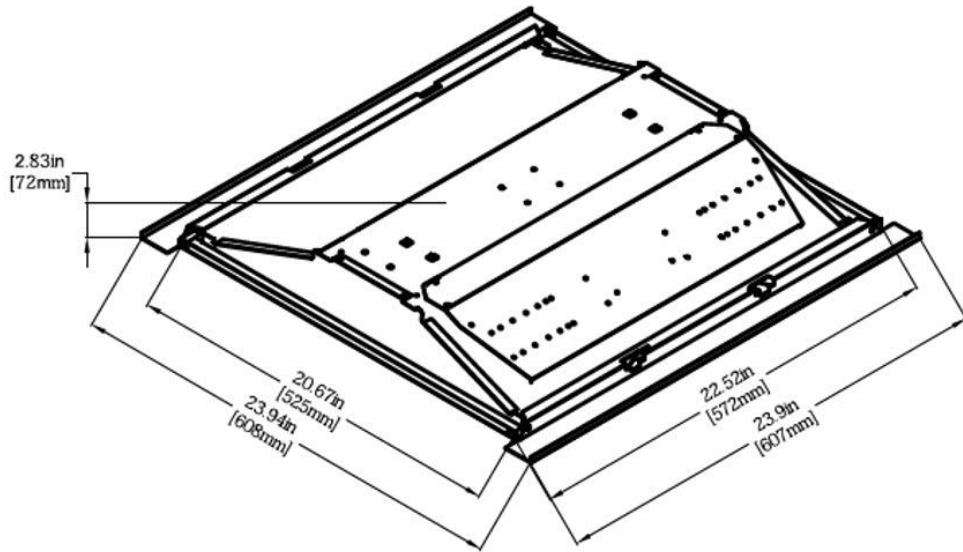

MODEL	QUANTITY	WEIGHT
TRK-22-29/D10/B/50	1	7.93 lbs

OPTIONAL ACCESSORIES



LOC-EMDR-15W-050



LOD-EXTD-M20W