

Date: _____ Location: _____
 Product: _____ Project: _____
 Quantity: _____ Catalog #: _____


LED T5 Tube Series

FEATURES

- **2FT & 3FT models:** Type A double ended or Type B Double Ended
- **4FT model:** Type A double ended or Type B single or double ended
- IP20 rated
- Low thermal decay & maintenance
- No Mercury, UV or Lead
- 50,000 hours lifetime
- NSF rated for food zone (non-contact), splash zone and non-food zone

SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

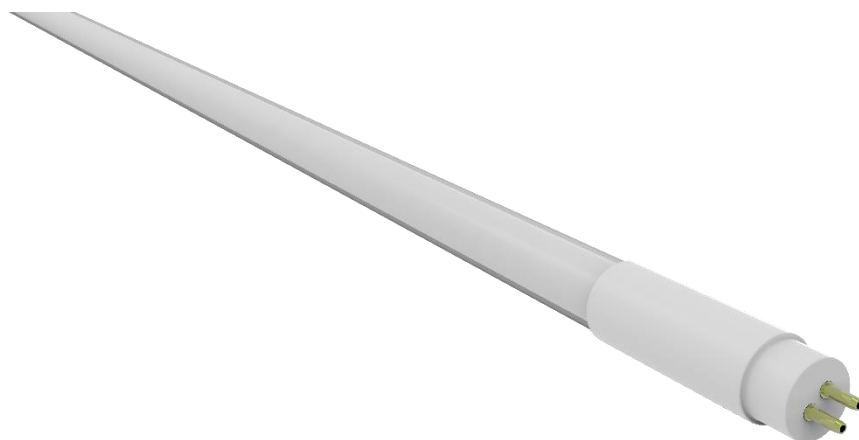

CONSTRUCTION:

Glass with shatterproof coating. Frosted lens.

OPTICAL SYSTEM:

Hongli 2835 LED chips. 175° beam angle.
320° field angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 45°C, -4°F to 113°F

INSTALLATION & MOUNTING:

Type A + B. G13 base.



MODEL NUMBER	SIZE	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-T52FT-12W50K-SGFD YM**	2FT	12W	1,740LM	130LM/W	80	0.9	10%	
LOC-T53FT-18W50K-SGFD YM**	3FT	18W	2,610LM	130LM/W	80	0.9	10%	
LOC-T54FT-24W40K-SGFD YM	4FT	24W	3,500LM	127.27LM/W	83	0.9	10%	F54T5/HO
LOC-T54FT-24W50K-SGFD YM	4FT	24W	3,600LM	130.91LM/W	83	0.9	10%	F54T5/HO

Note: ** is NOT a DLC listed product


DLC Product ID:

- LOC-T54FT-24W40K-SGFD YM – PLOIZOO3ACC2
- LOC-T54FT-24W50K-SGFD YM – PL5TV6YJ4NSD


Series	Size	Wattage	CCT Options	Style	Power
LOC-T5	2FT = 2 Foot 3FT = 3 Foot 4FT = 4 Foot	12W (2 foot only) 18W (3 foot only) 24W (4 foot only)	4000K (4 foot only) 5000K	SGFD = shatterproof glass, frosted	YM = Type A + B

MEASUREMENTS


2 Foot

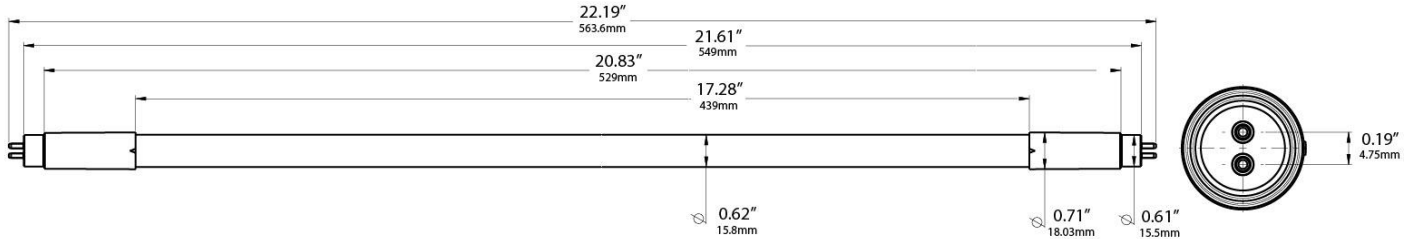

3 Foot

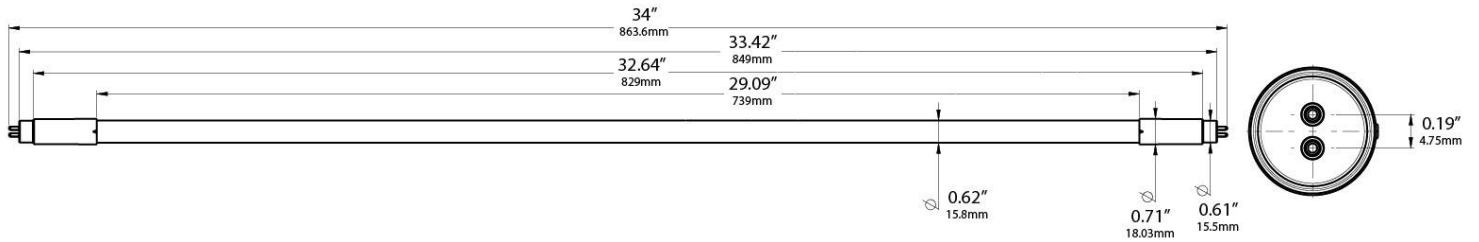

4 Foot

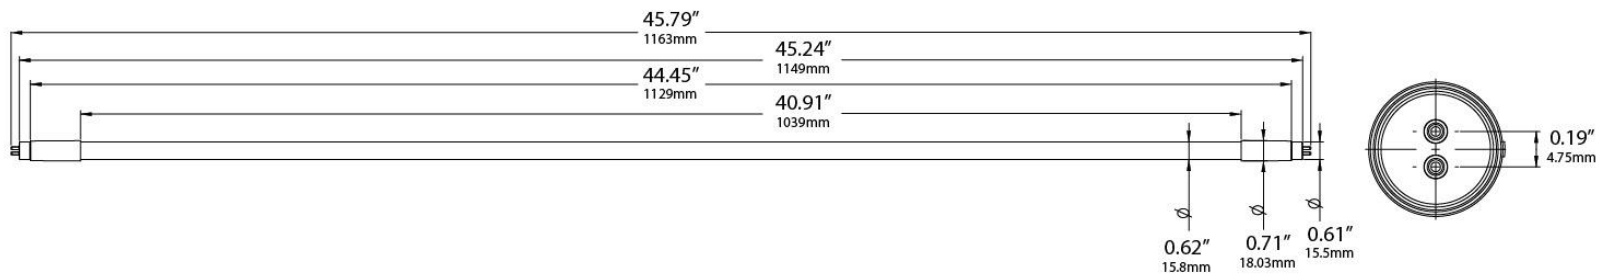

MODEL NUMBER	QUANTITY	WEIGHT	UPC CODE
LOC-T52FT-12W50K-SGFD YM	1	0.18 lbs	00810050941211
LOC-T53FT-18W50K-SGFD YM	1	0.26 lbs	00810050941228
LOC-T54FT-24W40K-SGFD YM	1	0.35 lbs	00810050941242
LOC-T54FT-24W50K-SGFD YM	1	0.35 lbs	00810050941082