LEDone®

Date: _____ **Location**: _____

Product: _____**Project**: _____

Quantity: _____**Catalog #**: _____

LED 4FT Wrap Around Light

FEATURES

- Default Wattage: 44W
- Default CCT: 5,000K
- IP20 rated
- ABS endcaps design for easy install/removal of lens
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Parking Lots
- Supermarkets
- Corridors
- Retail Spaces
- Warehouses

CONSTRUCTION:

22-gauge metal housing with matte white finish. PMMA cover lens.

OPTICAL SYSTEM:

Samsung 2835 LED chips. Frosted lens. 110° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Suspension or surface mounting options.

Metal joiner bracket:

- 4 foot can link up to 10 pieces

CONTROLS & DIMMING:

0-10V dimming comes standard.

MODEL NUMBER	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LWP4-22/28/34/44/D10/U/35-40-50	22W	3,031.6LM	137.8LM/W	80	0.9	20%	
LWP4-22/28/34/44/D10/U/35-40-50	28W	3,858.4LM	137.8LM/W	80	0.9	20%	
LWP4-22/28/34/44/D10/U/35-40-50	34W	4,685.2LM	137.8LM/W	80	0.9	20%	
LWP4-22/28/34/44/D10/U/35-40-50	44W	6,063.2LM	137.8LM/W	80	0.9	20%	

MEASUREMENTS

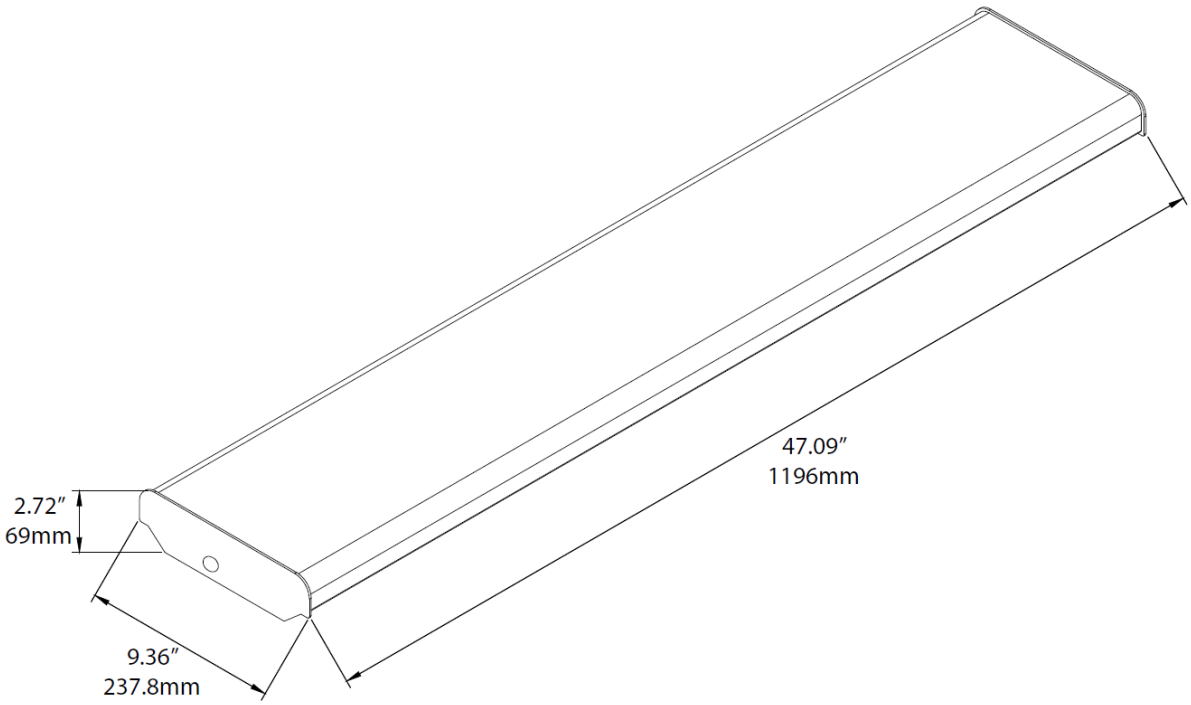

MODEL	QUANTITY	WEIGHT
LWP4-22/28/34/44/D10/U/35-40-50	1	lbs

OPTIONAL ACCESSORIES

Emergency Battery
LOC-EMDR-15W-050

Suspension Kit
(Not included)

Metal Joiner Bracket
(Not included)

PHOTOMETRIC DATA

LEDone®

4 FOOT 22W

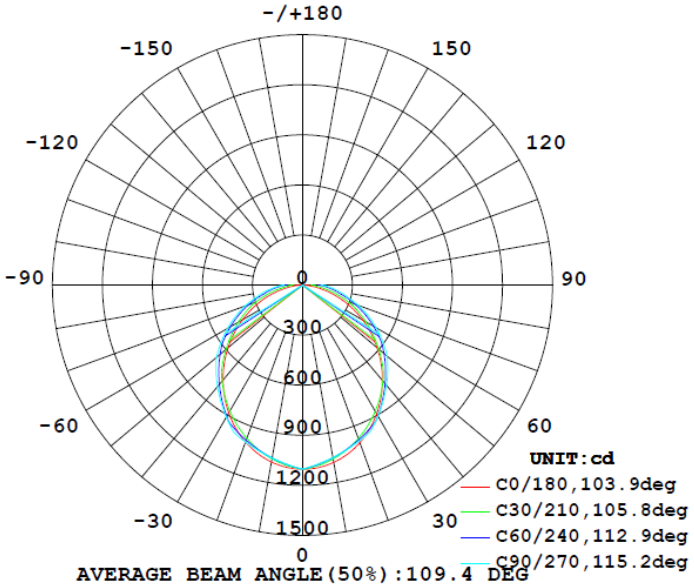

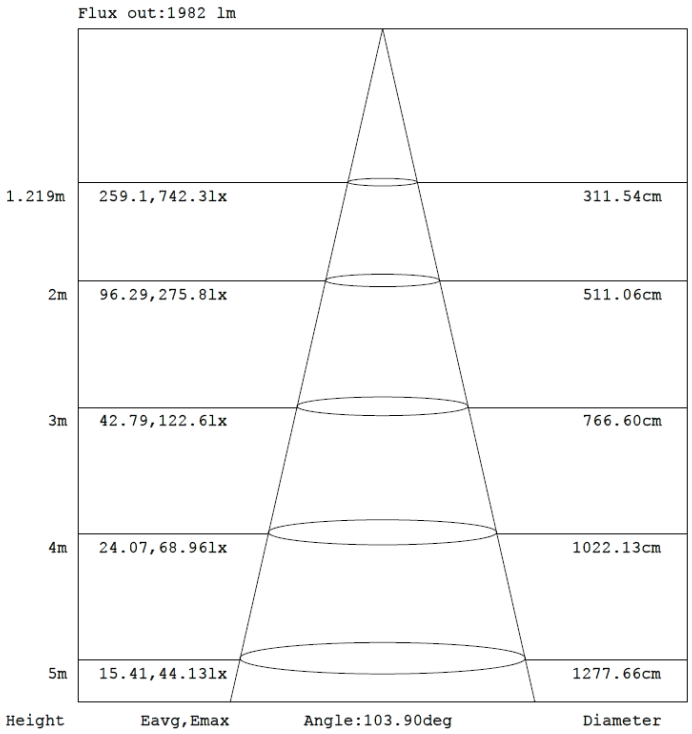

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

4 FOOT 28W

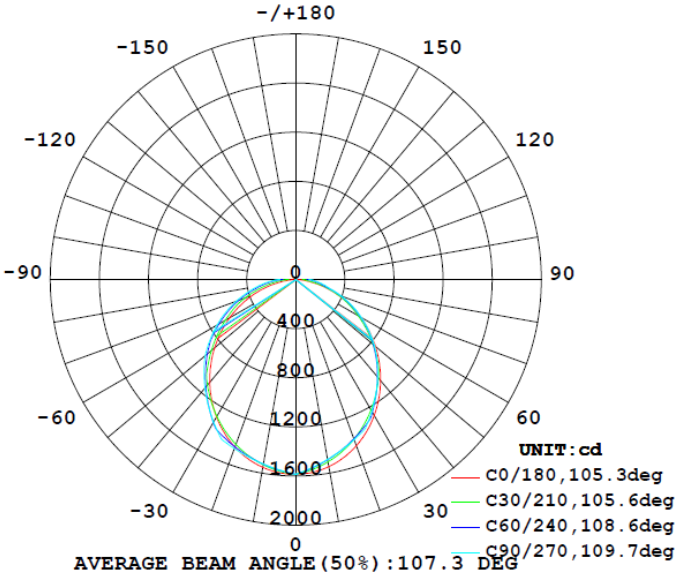

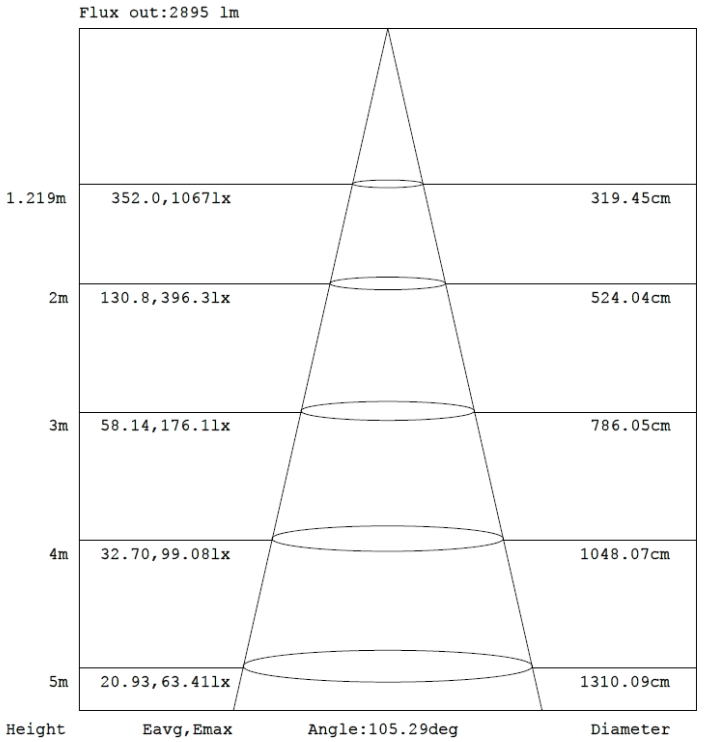

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

PHOTOMETRIC DATA

LEDone®

4 FOOT 34W

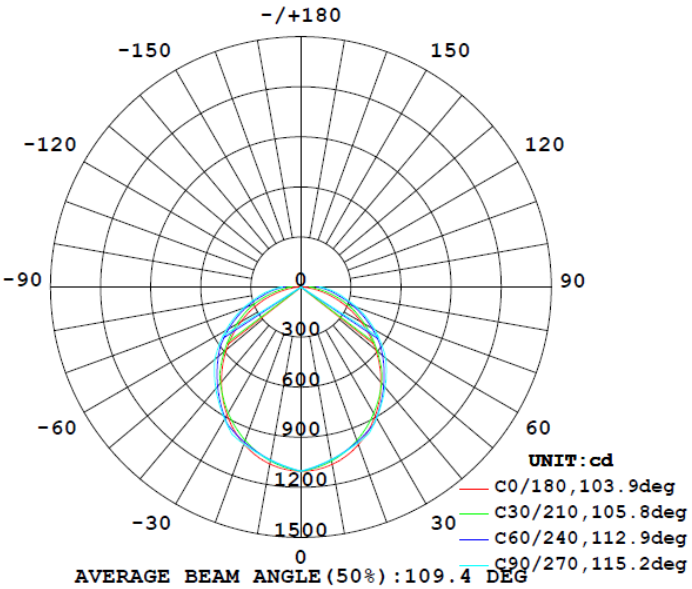

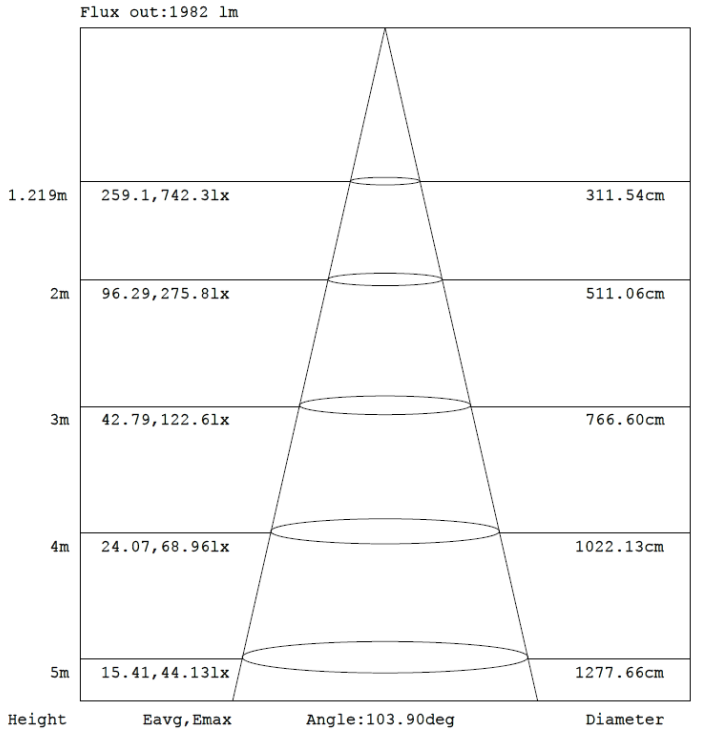

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

4 FOOT 44W

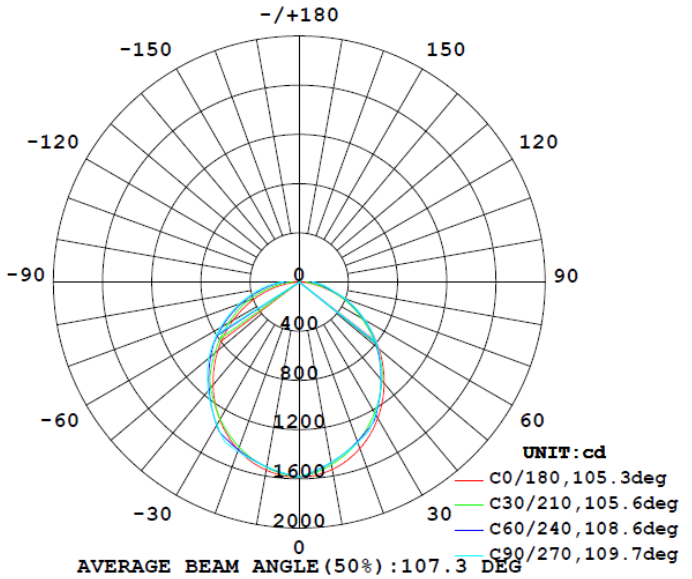

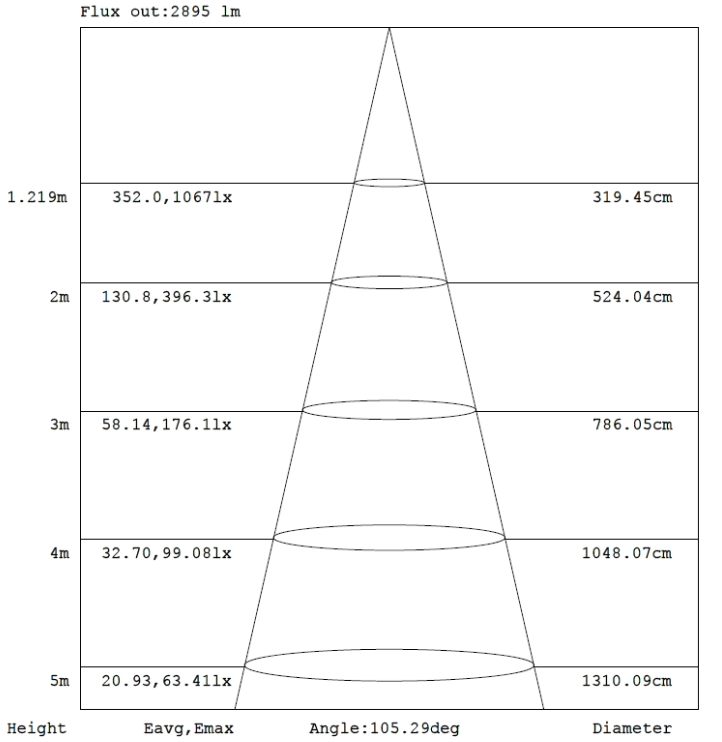

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.