

Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____

LED 4FT 24W Type B



FEATURES

- Type B Double Ended
- Shatterproof glass
- Low thermal decay & maintenance
- No Mercury or UV
- NOT suitable for enclosed fixtures
- 50,000 hours lifetime
- NSF rated for splash zone and non-food zone

SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

NSF Model Number:

- LOC-4FTT8GP-24W50K

CONSTRUCTION:

Shatterproof glass body with PET film and soft light.

OPTICAL SYSTEM:

200° beam angle / 300° view angle

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F.

INSTALLATION & MOUNTING:

Type B double ended




MODEL NUMBER	CCT	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD
LOD-GDMT84F-24W50KF YM	5,000K	24W	3,200LM	134LM/W	80	0.9	10%

DLC Product ID:

- LOD-GDMT84F-24W50KF YM - PUWKXZGZ
-

Series	Type	Wattage	CCT Options	Lens
LOD-YM	T8 4 Foot	24W	5000K	Frosted

MEASUREMENTS

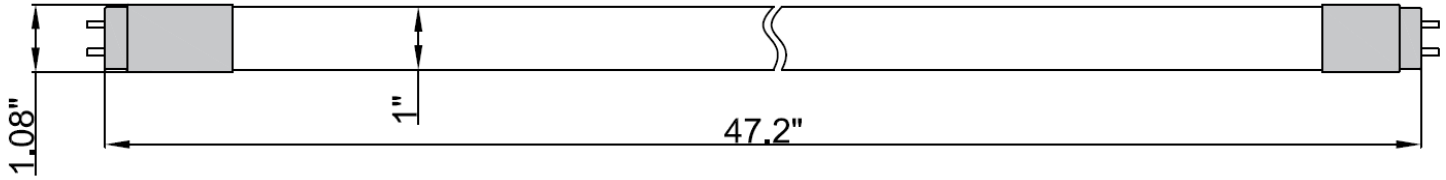

MODEL	QUANTITY	WEIGHT	UPC CODE
LOD-GDMT84F-24W50KF YM	1	0.526 lbs	00815586025466