

## LED 4FT 9W or 12W T8 Type B Tube

### CONSTRUCTION:

Shatterproof glass body with PET film and soft light, and PC cap.

### OPTICAL SYSTEM:

2835 LED chips. 190° beam angle

### WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

### ELECTRICAL:

Available as 120-277V input.  
-20°C to 45°C, -4°F to 113°F

### INSTALLATION & MOUNTING:

Type B single or double ended.

### FEATURES

- NSF approved
- Type B Single or Double Ended
- Shatterproof glass
- Low thermal decay & maintenance
- No Mercury or UV
- NOT suitable for enclosed fixtures
- 50,000 hours lifetime
- NSF rated for splash zone and non-food zone

### SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

### NSF Model Numbers:

- LOC-4FTT8GP-9W40K
- LOC-4FTT8GP-9W50K
- LOC-4FTT8GP-12W40K
- LOC-4FTT8GP-12W50K

### DLC Product ID:

- LOC-T84FT-9W40KGF B - S-3BC78I
- LOC-T84FT-9W50KGF B - S-QCWSF8
- LOC-T84FT-12W40KGF B - S-7XLR8T
- LOC-T84FT-12W50KGF B - S-GMWNO4




### OPTIONAL ACCESSORY:



Emergency Battery  
LOC-EMDR-25WHV

LOC-T84FT-9W40KGF B								
WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
9W	4000K	1,750LM	194.44lm/W	120-277V	83	0.9	20%	32W
LOC-T84FT-9W40KGF B								
WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
9W	5000K	1,750LM	194.44lm/W	120-277V	83	0.9	20%	32W
LOC-T84FT-9W40KGF B								
WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
12W	4000K	2,000LM	166.7lm/W	120-277V	83	0.9	20%	32W
LOC-T84FT-9W40KGF B								
WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
12W	5000K	2,000LM	166.7lm/W	120-277V	83	0.9	20%	32W

## MEASUREMENTS

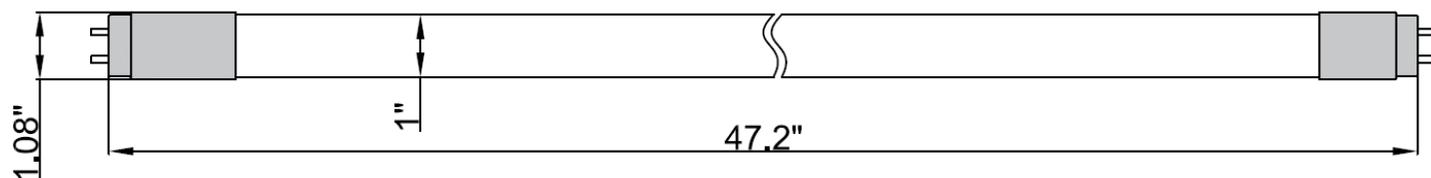

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-T84FT-9W40KGF B	1	lbs	00810050942635
LOC-T84FT-9W50KGF B	1	lbs	00810050942645
LOC-T84FT-12W40KGF B	1	lbs	00815586023677
LOC-T84FT-12W50KGF B	1	lbs	00815586023707