

# LEDone<sup>®</sup>

## LOC-AWP-MWMCCT Series Installation Guide

### SAFETY INSTRUCTIONS: Read instructions carefully before attempting to install fixture.

- All wiring should be performed by a qualified electrician.
- Disconnect power before installing or servicing. This fixture must be wired in accordance with the National Electrical Code and applicable local codes and ordinances.
- Proper grounding is required to ensure personal safety.
- This fixture is for outdoor use and should not be used in areas with limited ventilation or high ambient temperatures.

### CAUTION: Risk of fire

- **WARNING:** Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.

### CLEANING & MAINTENANCE:

CAUTION: Be sure the fixture temperature is cool enough to touch. Do NOT clean or maintain while the fixture is energized.

1. Clean lens with non-abrasive cleaning solution.
2. Do NOT open fixture to clean the LED. Do NOT touch the LED.

Note: These instructions do not cover all details or variation in equipment, nor do they provide for every possible situation during installation, operation or maintenance.

### TROUBLESHOOTING:

1. Check that the line voltage at fixture is correct. Refer to wiring directions.
2. Check that the fixture is grounded properly.


### MOUNTING:

To ensure weatherproof seal, apply weatherproof silicone sealant around the edge of the housing and/or junction box. This is especially important with an uneven wall surface. Silicone all plugs and unused conduit entries.

### WIRING: 0-10V Dimmable


Universal voltage driver permits operation at 120V through 277V, 50/60Hz.

1. Connect the BLACK fixture lead to the (+) LIVE line supply lead.
2. Connect the WHITE fixture lead to the (-) COMMON supply wire.
3. Connect the GROUND wire from fixture to the supply ground.
4. Connect the PURPLE fixture lead to the (V+) DIM lead.
5. Connect the PINK or GRAY fixture lead to the (V-) DIM lead.
6. Cap the Vaux 12V fixture lead, if present. Do NOT connect.

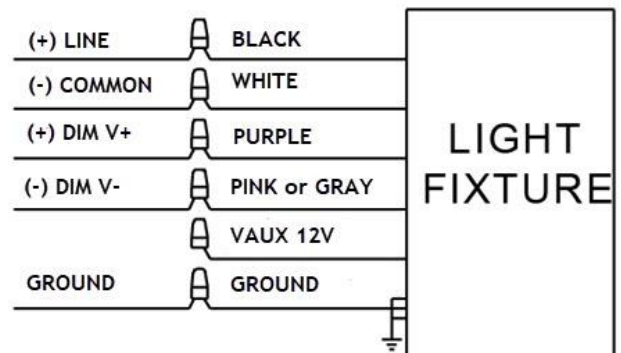

## INSTALLATION:

1. Loosen the screws to take the quick installation plate off.
2. Fix the quick installation plate onto the wall.
3. Connect the incoming and outgoing wires.
4. Install the fixture body to the quick installation plate and tighten the screws.
5. Use the angle adjustments to adjust to the desired angle.

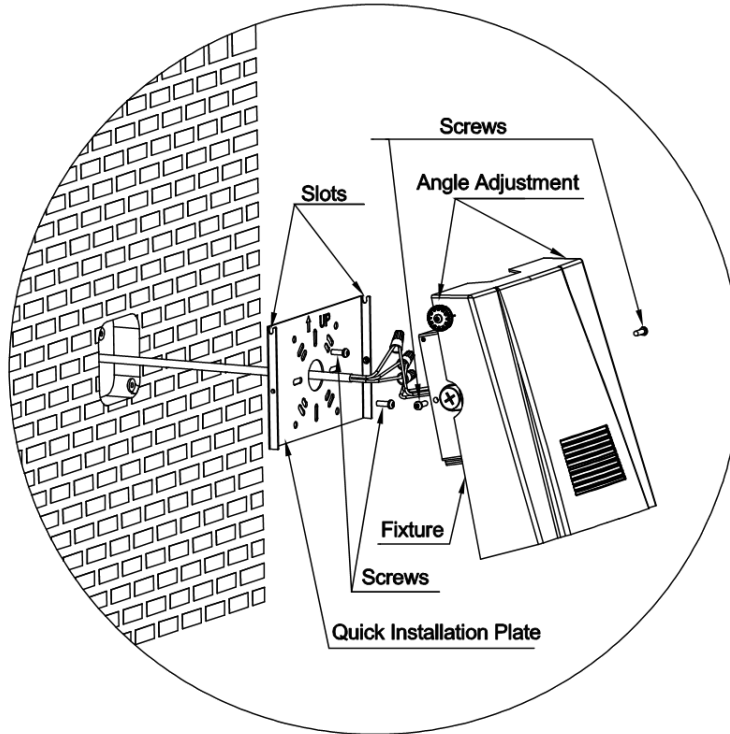

## WATTAGE AND CCT ADJUSTABLE TABLE SWITCH SETTING:

Unscrew cap on the side of the fixture up to access adjustable settings.

