

Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____



LED Multi Wattage Multi CCT Square Canopy Light (Emergency Battery Option)

CONSTRUCTION:

Heavy die-cast aluminum housing with polyester powder-coated finish

OPTICAL SYSTEM:

Seoul 2835 LED chips. Frosted lens. 135° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Wall Mounting with quick mount back plate for easy installation.

CONTROLS & DIMMING:

0-10V dimming comes standard.

FEATURES

- Default Wattage: 75W
- Default CCT: 5,000K
- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

MOUNTING OPTION:



Wall Mounting
Quick Mount Back Plate

TEST BUTTON: For models with emergency battery pre-installed



DLC Product ID:

- LOC-SQCP-MW(40/50/60/75)MCCT(30/40/50)DLV – S-WHLYR6
- LOC-SQCP-MW(40/50/60/75)MCCT(30/40/50)DLV-EM – S-WHLYR6

TAA Compliant Option Available.

Contact your Sales Representative for more information.



OPTIONAL ACCESSORIES:



Microwave Sensor
LOD-BR1810-B-D
(Compatible with remote control)



Remote Control
LOD-RC-100

Note: We have stock of the Square Canopy with emergency battery pre-installed.


LOC-SQCP-MW(40/50/60/75)MCCT(30/40/50)DLV

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
40W	3000K / 4000K / 5000K	5,400LM	135lm/W	120-277V	70	0.9	20%	100W – 320W HID
50W	3000K / 4000K / 5000K	6,750LM	135lm/W	120-277V	70	0.9	20%	100W – 320W HID
60W	3000K / 4000K / 5000K	8,100LM	135lm/W	120-277V	70	0.9	20%	100W – 320W HID
75W	3000K / 4000K / 5000K	10,125LM	135lm/W	120-277V	70	0.9	20%	100W – 320W HID

LOC-SQCP-MW(40/50/60/75)MCCT(30/40/50)DLV (WITH EMERGENCY BATTERY)

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
40W	3000K / 4000K / 5000K	5,400LM	135lm/W	120-277V	70	0.9	20%	100W – 320W HID
50W	3000K / 4000K / 5000K	6,750LM	135lm/W	120-277V	70	0.9	20%	100W – 320W HID
60W	3000K / 4000K / 5000K	8,100LM	135lm/W	120-277V	70	0.9	20%	100W – 320W HID
75W	3000K / 4000K / 5000K	10,125LM	135lm/W	120-277V	70	0.9	20%	100W – 320W HID

MEASUREMENTS

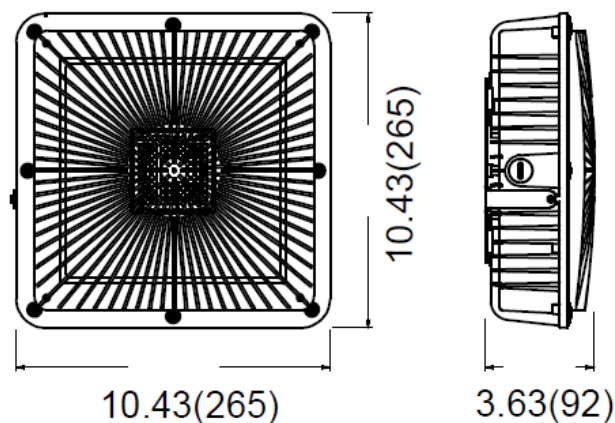

MODEL	QTY	NET WEIGHT	MASTER CARTON SIZE	GROSS WEIGHT	PCS CTN	UPC CODE
LOC-SQCP-MW(40/50/60/75)MCCT(30/40/50)DLV	1	6.5lbs	17.2" x 12" x 12.2"	24.1lbs	4	00815586028580
LOC-SQCP-MW(40/50/60/75)MCCT(30/40/50)DLV-EM	1	6.8lbs	17.2" x 12" x 12.2"	28.85lbs	4	00810050942683