

Date: \_\_\_\_\_ Location: \_\_\_\_\_  
 Product: \_\_\_\_\_ Project: \_\_\_\_\_  
 Quantity: \_\_\_\_\_ Catalog #: \_\_\_\_\_

## LED 4FT PC YM Tube



Clear Lens

### FEATURES

- Type B Single or Double Ended
- Plug & Play Dual Mode (Type A & B)
- Low thermal decay & maintenance
- No Mercury or UV
- NOT suitable for enclosed fixtures
- 50,000 hours lifetime
- NSF rated for splash zone and non-food zone

### SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

### CONSTRUCTION:

PC body with PET film and soft light.

### OPTICAL SYSTEM:

BXEN-27E-11M-3A LED chips. 240° beam angle

### WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

### ELECTRICAL:

Ballast compatible. Available as 120-277V input. Single end and double ended are all available which can be compatible with shunted or non-shunted sockets. -20°C to 50°C, -4°F to 122°F.

### INSTALLATION & MOUNTING:

Type B single or double ended. Plug & Play dual mode (Type A & B).

### CONTROLS & DIMMING:

Continuous dimming; quick power switch 1.5 seconds. The light will slowly change and then power off.

### NSF Model Number:

- LOC-4FTT8PP-15W50K



MODEL NUMBER	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
LOC-T84FT-15W50KPCC YM	15W	2,700LM	180LM/W	83	0.9	20%	32W – 36W

### DLC Product ID:

- LOC-T84FT-15W50KPCC YM – S-7FW462


### OPTIONAL ACCESSORY:



Emergency Battery  
LOC-EMDR-25WHV

Series	Type	Wattage	CCT Options	Lens	Power
LOC-PC YM	T8 4 Foot	15W	5000K	C = Clear	YM – Type A & B

## MEASUREMENTS

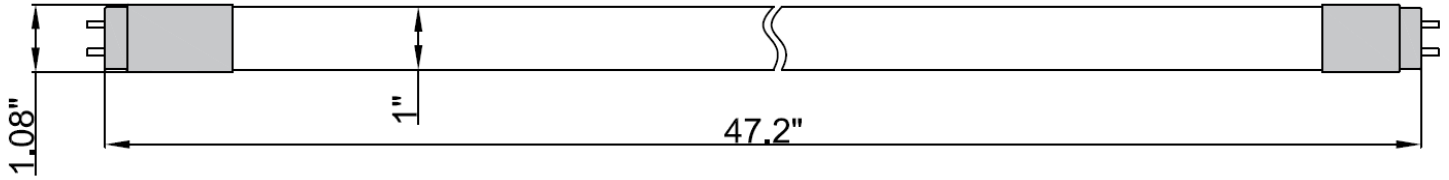

MODEL NUMBER	QUANTITY	WEIGHT	UPC CODE
LOC-T84FT-15W50KPCC YM	1	0.526 lbs	00815586025688