

LED Multi Wattage Multi CCT Post Top Light



CONSTRUCTION:

Polyester powder-coated finish

OPTICAL SYSTEM:

Philips Lumileds 3030 LED chips. 120° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Pole mounting – Suitable for 3” poles

CONTROLS & DIMMING:

0-10V dimming comes standard.

FEATURES

- Default Wattage: 150W
- Default CCT: 5,000K
- IP65 rated
- Type 5 lens
- Rust & corrosion proof
- No lead or mercury
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Area lighting
- Parking decks
- Auto dealerships
- High masts
- Housing complexes
- Shopping malls
- Sporting complexes
- Parks and Recreational areas
- Municipal lots

DLC Product ID:

- LOC-PT-MW(60/80/100/150)MCCT(30/40/50)DLV – S-84G27F

TAA Compliant Option Available.

Contact your Sales Representative for more information.



OPTIONAL ACCESSORIES:



Microwave Sensor
LOC-ACY-S-MWS-01-G1
(Compatible with LOC-RC-WHITE-G1)



Microwave Bluetooth Sensor
LOC-ACY-S-MWS-BT-01-G1
(Compatible with App)



PIR Bluetooth Sensor
LOC-ACY-S-PIRS-BT-01-G1
(Compatible with App)



PIR Sensor
LOC-ACY-S-PIRS-01-G1
(Compatible with LOC-RC-WHITE-G1)



Remote Control
LOC-RC-WHITE-G1



Photocell (Daylight Sensor)
LOC-SK-101-4T
(Not compatible with remote control)



Motion Sensor
LOC-ANT-5-4T
(Compatible with LOD-RC-100)




Remote Control
LOD-RC-100

| BUG RATING | EPA |
|------------|------|
| B4-U1-G1 | 1.96 |

LOC-PT-MW(60/80/100/150)MCCT(30/40/50)DLV

| WATTAGE SELECTABLE | CCT SELECTABLE | LUMENS | EFFICACY | VOLTAGE | CRI | POWER FACTOR | THD | REPLACES |
|--------------------|-----------------------|------------|------------|----------|-----|--------------|-----|----------------|
| 60W | 3000K / 4000K / 5000K | 8,251.8LM | 137.53lm/W | 120-277V | 71 | 0.974 | 8% | 50W – 100W HID |
| 80W | 3000K / 4000K / 5000K | 11,002.4LM | 137.53lm/W | 120-277V | 71 | 0.974 | 8% | 50W – 100W HID |
| 100W | 3000K / 4000K / 5000K | 13,753LM | 137.53lm/W | 120-277V | 71 | 0.974 | 8% | 50W – 100W HID |
| 150W | 3000K / 4000K / 5000K | 20,897LM | 137.53lm/W | 120-277V | 71 | 0.974 | 8% | 50W – 100W HID |

MEASUREMENTS

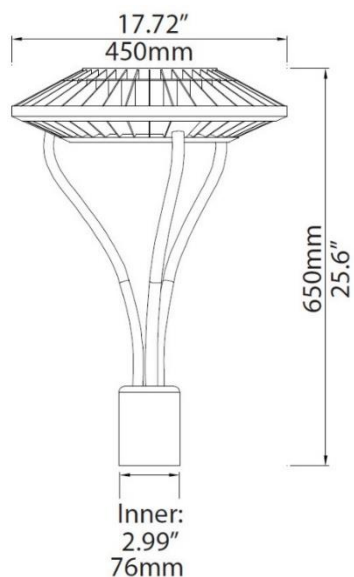

| MODEL | QTY | NET WEIGHT | MASTER CARTON SIZE | GROSS WEIGHT | PCS CTN | UPC CODE |
|---|-----|------------|----------------------|--------------|---------|---------------------------------|
| LOC-PT-MW(60/80/100/150)MCCT(30/40/50)DLV | 1 | 15.43lbs | 19.5" x 19.55" 8.75" | 18.15lbs | 1 | 00810050941310 / 00810050945820 |

ADJUSTABLE WATT & CCT

