


LED 9.5W Type B Tube Family Series

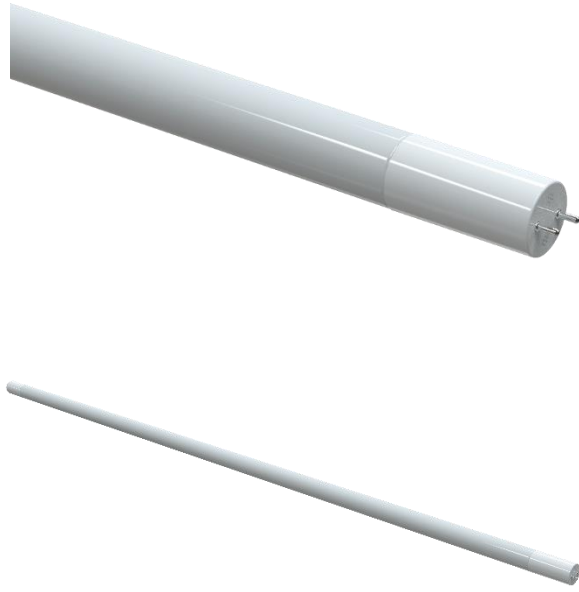

CONSTRUCTION:

Shatterproof glass body with PET film and soft light, and PC cap.

OPTICAL SYSTEM:

2835 LED chips. 270° beam angle

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input.
-20°C to 45°C, -4°F to 113°F

INSTALLATION & MOUNTING:

Type B single or double ended.

FEATURES

- NSF approved
- Type B Single or Double Ended
- Shatterproof glass
- Low thermal decay & maintenance
- No Mercury or UV
- IP20 rated
- NOT suitable for enclosed fixtures
- 50,000 hours lifetime
- NSF rated for splash zone and non-food zone

SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

OPTIONAL ACCESSORY:



Emergency Battery
LOC-EMDR-25WHV

DLC Product ID:

- LOC-4FTT8B-9.5W40K – S-0UMPBG
- LOC-4FTT8B-9.5W50K – S-4GN1L9




LOC-4FTT8B-9.5W40K

| WATTAGE | CCT | LUMENS | EFFICACY | VOLTAGE | CRI | POWER FACTOR | THD | REPLACES |
|---------|-------|---------|----------|----------|-----|--------------|-----|----------|
| 9.5W | 4000K | 1,600LM | 168lm/W | 120-277V | 82 | 0.9 | 20% | |

LOC-4FTT8B-9.5W50K

| WATTAGE | CCT | LUMENS | EFFICACY | VOLTAGE | CRI | POWER FACTOR | THD | REPLACES |
|---------|-------|---------|----------|----------|-----|--------------|-----|----------|
| 9.5W | 5000K | 1,600LM | 168lm/W | 120-277V | 82 | 0.9 | 20% | |

MEASUREMENTS

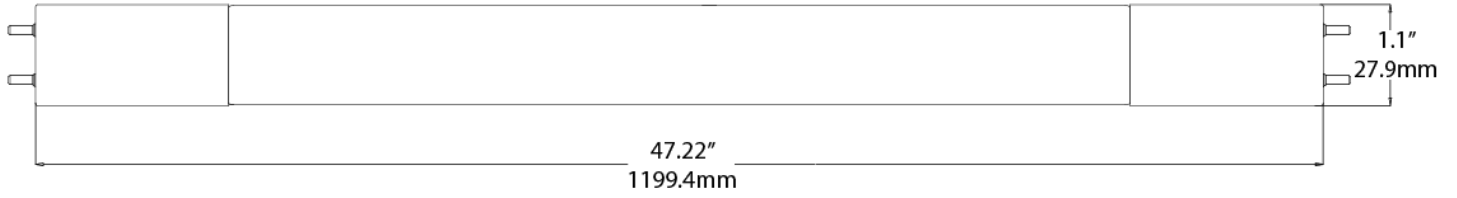

| MODEL | QUANTITY | WEIGHT | UPC CODE |
|--------------------|----------|----------|----------------|
| LOC-4FTT8B-9.5W40K | 1 | 0.43 lbs | 00810050943598 |
| LOC-4FTT8B-9.5W40K | 1 | 0.43 lbs | 00810050943604 |