LEDone®

Date: _____ **Location:** _____

Product: _____ **Project:** _____

Quantity: _____ **Catalog #:** _____

LED 9.5W Type B Tube Family Series

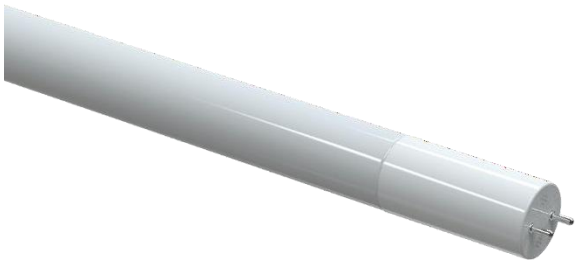

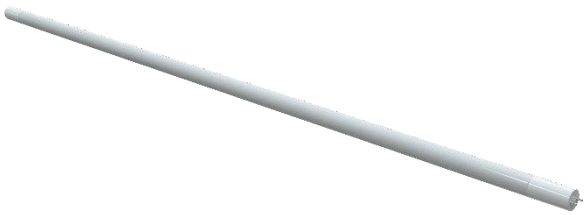

CONSTRUCTION:
Shatterproof glass body with PET film and soft light, and PC cap.

OPTICAL SYSTEM:
2835 LED chips. 270° beam angle

WARRANTY:
5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:
Available as 120-277V input.
-20°C to 45°C, -4°F to 113°F

INSTALLATION & MOUNTING:
Type B double ended.

FEATURES

- Type B Double Ended
- Shatterproof glass
- Low thermal decay & maintenance
- No Mercury or UV
- IP20 rated
- NOT suitable for enclosed fixtures
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

OPTIONAL ACCESSORY:

Emergency Battery
LOC-EMDR-25WHV

DLC Product ID:

- LOC-4FTT8B-9.5W40K – S-0UMPBG
- LOC-4FTT8B-9.5W50K – S-4GN1L9

DLC LISTED

UL CERTIFIED

LOC-4FTT8B-9.5W40K								
WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
9.5W	4000K	1,600LM	168lm/W	120-277V	82	0.9	20%	
LOC-4FTT8B-9.5W50K								
WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
9.5W	5000K	1,600LM	168lm/W	120-277V	82	0.9	20%	

MEASUREMENTS

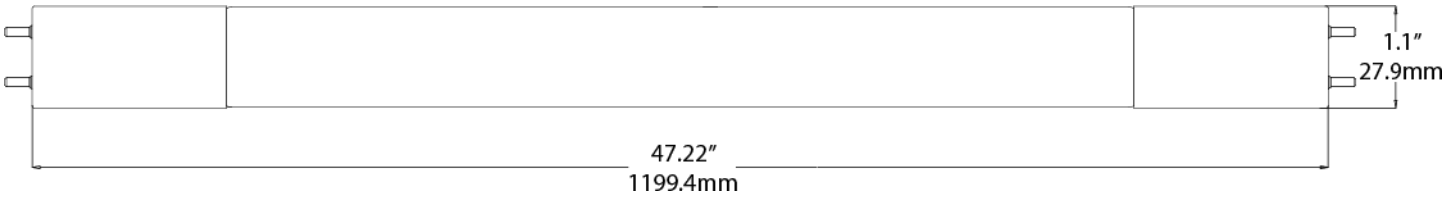

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-4FTT8B-9.5W40K	1	0.43 lbs	00810050943598
LOC-4FTT8B-9.5W40K	1	0.43 lbs	00810050943604