

LED LOC-#FTLHB Linear High Bay Light Family Series



2 Foot: 160W



4 Foot: 220W or 320W

CONSTRUCTION:

Die formed galvanized steel, white paint. Isolated driver with wide voltage input option. Frosted PMMA lens. (Clear lens special order)

OPTICAL SYSTEM:

LED chips. 120° beam angle options.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 40°C, -4°F to 104°F

INSTALLATION & MOUNTING:

Surface mount, hanging hook or pendant mount.

CONTROLS & DIMMING:

1-10V dimming comes standard. Suitable for use with LED dimmers.

FEATURES

- IP40 rated
- DC 12V auxiliary
- Easy installation and maintenance
- 100,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Supermarkets
- Logistic Centers
- Exhibition Halls

MOUNTING OPTIONS:



Pendant Mount



Chain & Hook

DLC Product ID:

- LOC-2FTLHB-160W50KD – PLG2NL4W
- LOC-4FTLHB-220W50KD – PT4CO9EL
- LOC-4FTLHB-320W50KD - PVJEPYXF



OPTIONAL ACCESSORIES:



Microwave Sensor
LOC-ACY-S-MWS-01-G1
(Compatible with LOC-RC-WHITE-G1)



Microwave Bluetooth Sensor
LOC-ACY-S-MWS-BT-01-G1
(Compatible with App)



PIR Sensor
LOC-ACY-S-PIRS-01-G1
(Compatible with LOC-RC-WHITE-G1)



PIR Bluetooth Sensor
LOC-ACY-S-PIRS-BT-01-G1
(Compatible with App)



Emergency Driver
LOC-EMDR-15W-050



Remote Control
LOC-RC-WHITE-G1



Photocell (Daylight Sensor)
LOC-SK-101-4T
(Not compatible with remote control)



Motion Sensor
LOC-ANT-5-4T
(Compatible with LOD-RC-100)



Remote Control
LOD-RC-100



Emergency Driver
LOC-EMDR-15W-050

LOC-2FTLHB-160W50KD

WATTAGE	SIZE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
160W	2 FOOT	5000K	22,080LM	138lm/W	120-277V	80	0.9	20%	W HID


LOC-4FTLHB-220W50KD

WATTAGE	SIZE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
220W	4 FOOT	5000K	30,580LM	139lm/W	120-277V	80	0.9	20%	W HID



LOC-4FTLHB-320W50KD

WATTAGE	SIZE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
320W	4 FOOT	5000K	44,160LM	138LM/W	120-277V	80	0.9	8.3%	W HID

WITH SENSOR INSTALLED

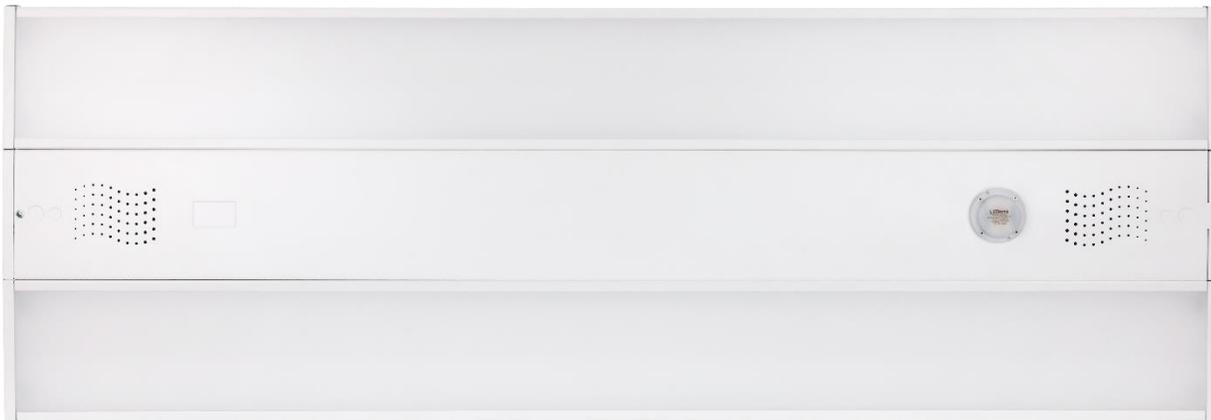

MEASUREMENTS

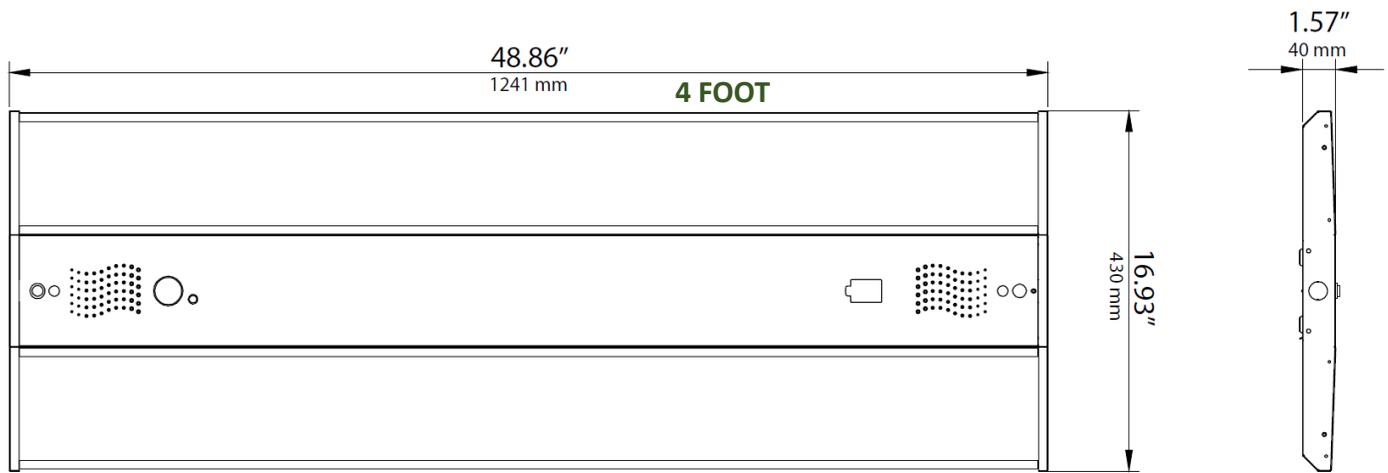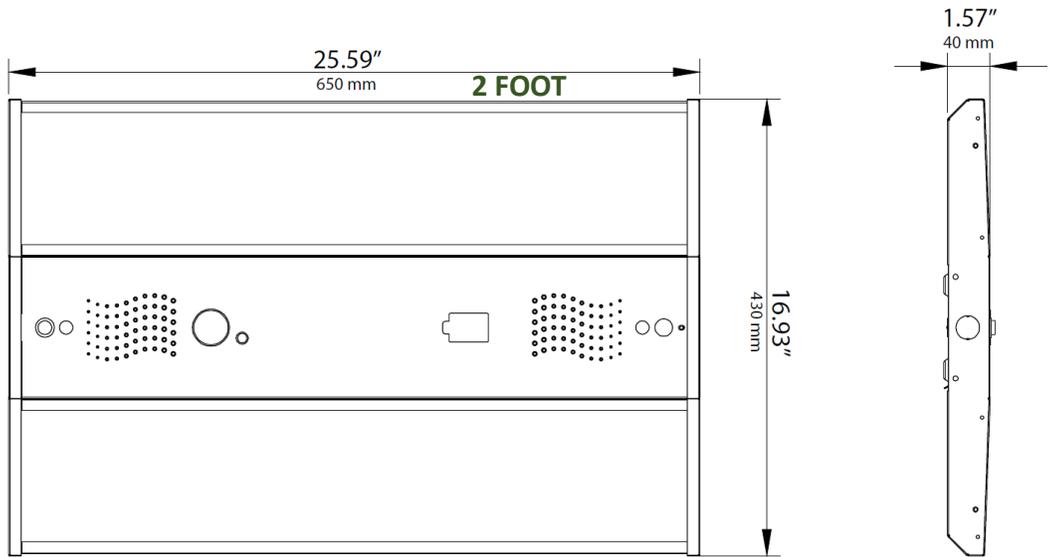

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-2FTLHB-160W50KD	1	11.02 lbs	00810050942454
LOC-4FTLHB-220W50KD	1	13.56 lbs	00810050942478
LOC-4FTLHB-320W50KD	1	13.56 lbs	00810050942485