

## LED MULTI WATTAGE MULTI CCT 4 FOOT WRAP AROUND LIGHT



30W / 40W / 50W / 60W

### CONSTRUCTION:

22-gauge metal housing with matte white finish. PMMA cover lens.

### OPTICAL SYSTEM:

Samsung 2835 LED chips. Frosted lens. 110° beam angle.

### WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

### ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

### INSTALLATION & MOUNTING:

Suspension or surface mounting options.

Metal joiner bracket

### CONTROLS & DIMMING:

0-10V dimming comes standard.

### FEATURES

- **Default Wattage:** 60W
- **Default CCT:** 5,000K
- IP20 rated
- ABS endcaps design for easy install/removal of lens
- 50,000 hours lifetime

### SUITABLE APPLICATIONS

- Parking Lots
- Supermarkets
- Corridors
- Retail Spaces
- Warehouses

### DLC Product ID:

- LOC-4FTWA-MW(30/40/50/60)MCCT(35/40/50) - S-HCRK89 (Low-Bay)
- LOC-4FTWA-MW(30/40/50/60)MCCT(35/40/50) - S-C74Z46 (Direct Linear)
- LOC-4FTWA-MW(30/40/50/60)MCCT(35/40/50) - S-P1TXF9 (Stairwell)



### OPTIONAL ACCESSORIES:



Suspension Kit  
(NOT included)



Metal Joiner Bracket  
(NOT included)



Emergency Driver  
LOC-EMDR-8W-AC



Emergency Driver  
LOC-EMDR-18W-AC-C



Emergency Driver  
LOC-EMDR-18W-AC-L

### LINKING TOGETHER:

SIZE	VOLTAGE	QUANTITY
4FT	@120V	7
4FT	@277V	17
4FT	@347V	21




Emergency Driver  
LOC-EMDR-16WLI-170SD

## LOC-4FTWA-MW(30/40/50/60)MCCT(35/40/50)

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
30W	3500K / 4000K / 5000K	3,936LM	131.2lm/W	120-277V	82	0.9	20%	
40W	3500K / 4000K / 5000K	5,248LM	131.2lm/W	120-277V	82	0.9	20%	
50W	3500K / 4000K / 5000K	6,560LM	131.2lm/W	120-277V	82	0.9	20%	
60W	3500K / 4000K / 5000K	7,872LM	131.2lm/W	120-277V	82	0.9	20%	

## MEASUREMENTS

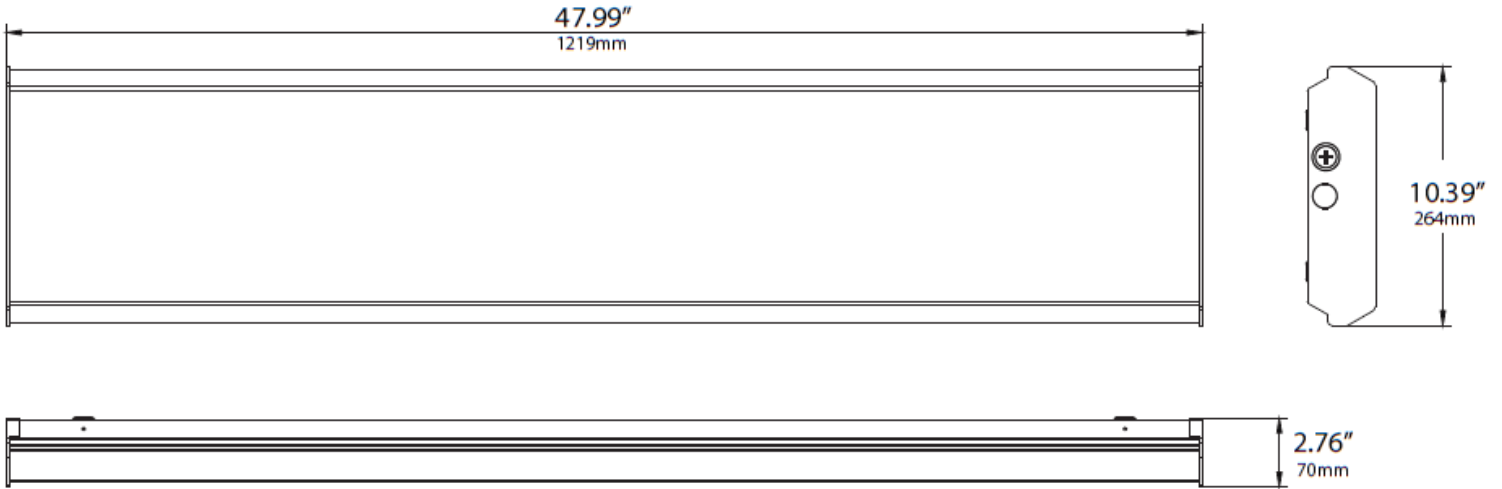

MODEL	QTY	NET WEIGHT	MASTER CARTON SIZE	GROSS WEIGHT	PCS CTN	UPC CODE
LOC-4FTWA-MW(30/40/50/60)MCCT(350/40/50)	1	10.14 lbs	49.88" x 11.77" x 3.46"	12.35 lbs	1	00810050947053