LEDone®

LOC-DMWP Family Series

LED Mini Wall Pack Light with Optional Pre-installed 4W Emergency Battery

A BRIGHTER TOMORROW

Bronze

White

CONSTRUCTION

- Heavy die-cast aluminum housing with polyester powder-coated finish
- Integral secondary heat sink to optimize thermal transfer
- Frosted lens
- Corrosion resistant
- Default wattage: 25W · Default CCT: 5,000K

OPTICAL SYSTEM

- Philips Lumileds 3030 LED chips
- High quality tempered glass optics
- 125° beam angle
- IP65 rated for outdoor wet-location applications

WARRANTY

- 5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL

- AC120-277V input
- -20°C to 50°C (-4°F to 122°F)
- 50,000-hour lifetime

INSTALLATION & MOUNTING

- Wall mounting for easy installation and maintenance.

CONTROLS & DIMMING

- Photocell included (built-in)
- Continuous dimming to 10% or below

FEATURES

- **Wattage selectable:** 8W / 15W / 25W
- **CCT selectable:** 3,000K / 4,000K / 5,000K
- **Up to 3,000 lm** at 120 lm/W
- **4W emergency battery** pre-installed with EM models
- Rotatable knob: non-cut-off to full cut-off
- Built-in photocell for dusk-to-dawn operation
- IP65 rated; corrosion resistant
- 50,000-hour lifetime
- 5-year limited warranty

SUITABLE APPLICATIONS

Warehouses	Stadiums
Factories	Parking Lots
Shopping Malls	Supermarkets
Logistic Centers	Auto Dealerships

ROTATABLE CUT-OFF KNOB

Rotate the knob on top to move the reflector to the desired cut-off level — from non cut-off to full cut-off.

Knob (top)

Non cut-off

Full cut-off

4W EMERGENCY BATTERY

Pre-installed with the EM models. The -EM variants ship with a built-in 4W emergency battery for code-compliant emergency egress lighting.

FOUR ORDERING VARIANTS

Bronze
UPC 00810050947749

White
UPC 00810050947763

Bronze — EM
UPC 00810050947756

White — EM
UPC 00810050947770

EnabLED Licensing Program for LED Luminaires and Retrofit Bulbs
Member
LED One Corporation
ENABLED

Performance & Ordering Data

LOC-DMWP Family Series · Selectable CCT 3000K / 4000K / 5000K · 120-277V · Bronze & White · EM options

LEDone®

LOC-DMWP-MW(8/15/25)MCCT(30/40/50)

Selectable wattage · performance identical across all four variants

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	TYPICAL REPLACEMENT
8W	3000K / 4000K / 5000K	960 lm	120 lm/W	120-277V	83	0.9	15%	**15W HID** / 10W Old LED (80 lm/W)
15W	3000K / 4000K / 5000K	1,800 lm	120 lm/W	120-277V	83	0.9	15%	**30W HID** / 20W Old LED (80 lm/W)
25W	3000K / 4000K / 5000K	3,000 lm	120 lm/W	120-277V	83	0.9	15%	**55W HID** / 35W Old LED (80 lm/W)

Housing dimensions

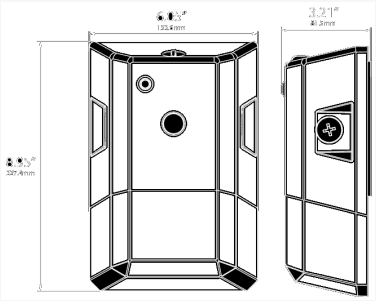

6.02 in	8.94 in	3.21 in
152.9 mm width	227.1 mm height	81.5 mm depth

Photocell & conduit entry

- Photocell cover — built-in dusk-to-dawn photocell included
- Conduit entry on the side for easy wiring
- CCT selectable 3000K / 4000K / 5000K (default 5,000K)
- Wattage selectable 8W / 15W / 25W (default 25W)

Ordering information

MODEL	QTY.	NET WEIGHT	MASTER CARTON SIZE	GROSS WEIGHT	UPC CODE
LOC-DMWP-MW(8/15/25)MCCT(30/40/50) — Bronze	1 pc	1.74 lbs	6.02″ × 3.07″ × 8.94″ (8 pcs/ctn)	17.8 lbs	00810050947749
LOC-DMWP-MW(8/15/25)MCCT(30/40/50) — White	1 pc	1.74 lbs	6.02″ × 3.07″ × 8.94″ (8 pcs/ctn)	17.8 lbs	00810050947763
LOC-DMWP-MW(8/15/25)MCCT(30/40/50)-EM — Bronze	1 pc	1.74 lbs	6.02″ × 3.07″ × 8.94″ (8 pcs/ctn)	17.8 lbs	00810050947756
LOC-DMWP-MW(8/15/25)MCCT(30/40/50)-EM — White	1 pc	1.74 lbs	6.02″ × 3.07″ × 8.94″ (8 pcs/ctn)	17.8 lbs	00810050947770

DLC Product IDs: LOC-DMWP-MW(8/15/25)MCCT(30/40/50) – S-JJ13Q0 · LOC-DMWP-MW(8/15/25)MCCT(30/40/50)-EM – S-ZCT66J
BUG rating (8W / 15W / 25W): B1-U3-G2

DLC LISTED PREMIUM

Warranty: 5-year limited warranty. Actual performance may differ as a result of end-user environment and application. Specifications are subject to change without notice.