

LED 8FT 38W T8 Type B Tube

CONSTRUCTION:

PC + Aluminum. Frosted or Clear lens (check below for more info)

OPTICAL SYSTEM:

Bridgelux or Shineon SMD 2835 LED chips.
140° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. Double ended are available which can be compatible with shunted or non-shunted sockets. -20°C to 40°C, -4°F to 104°F

INSTALLATION & MOUNTING:

Type B double ended.

FEATURES

- NSF approved
- Type B Double Ended
- Low thermal decay & maintenance
- No Mercury
- 50,000 hours lifetime
- NSF rated for splash zone and non-food zone

SUITABLE APPLICATIONS

- Commercial buildings
- Hotels
- Conference rooms
- Schools
- Supermarkets
- Factories
- Hospitals
- Office Buildings
- Airports

DLC Product ID:

- LOC-T88FT-38W40KPAF B – P0X4SU5X
- LOC-T88FT-38W50KPAF B – PWCXE3FW

** = Not DLC Listed:

- LOC-T88FT-38W50KPAC B

NSF Model Number:

- LOC-8FTT8AP-38W40K
- LOC-8FTT8AP-38W50K



G13 base with R17D end cap



FA8 base

OPTIONAL ACCESSORY:



Emergency Battery
LOC-EMDR-25WHV

LOC-T88FT-38W40KPAF B (G13) Frosted

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
38W	4000K	5,000LM	131.579lm/W	120-277V	80	0.9	20%	72W

LOC-T88FT-38W50KPAF B (G13) Frosted

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
38W	5000K	5,000LM	131.579lm/W	120-277V	80	0.9	20%	72W

LOC-T88FT-38W40KPAF B (FA8) Frosted

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
38W	4000K	5,000LM	131.579lm/W	120-277V	80	0.9	20%	72W



LOC-T88FT-38W50KPAF B (FA8) Frosted

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
38W	5000K	5,000LM	131.579lm/W	120-277V	80	0.9	20%	72W

LOC-T88FT-38W40KPAC B (FA8) Clear

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
38W	5000K	5,000LM	131.579lm/W	120-277V	80	0.9	20%	72W

MEASUREMENTS

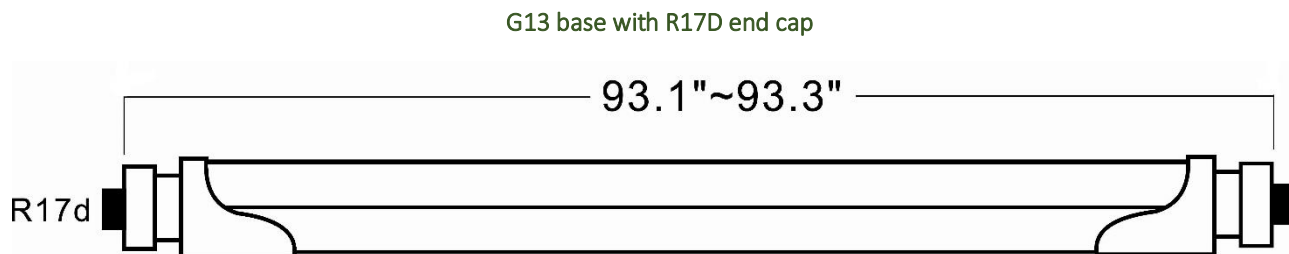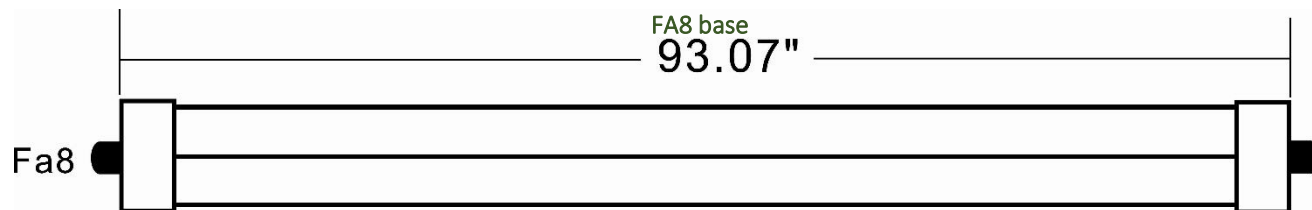

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-T88FT-38W40KPAF B	1	0.88 lbs	00815586028955
LOC-T88FT-38W50KPAF B	1	0.88 lbs	00815586028962
LOC-T88FT-38W50KPAC B	1	0.88 lbs	00810050940849